



# SILICON TRANSISTOR

## 2SA1608

### HIGH FREQUENCY AMPLIFIER AND SWITCHING PNP SILICON EPITAXIAL TRANSISTOR

**PACKAGE DIMENSIONS**

in millimeters

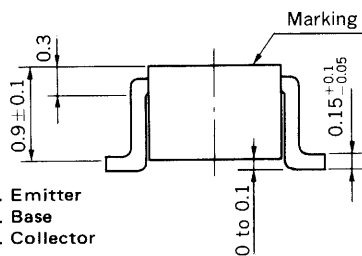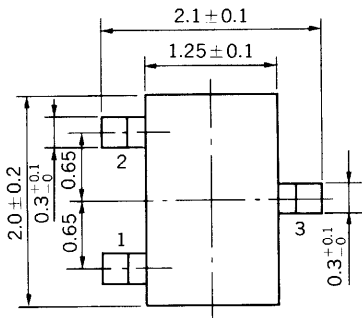

- 1. Emitter
- 2. Base
- 3. Collector

**FEATURES**

- High  $f_T$  :  $f_T = 400$  MHz
- Complementary to 2SC3739

**ABSOLUTE MAXIMUM RATINGS**

Maximum Voltages and Current ( $T_a = 25^\circ\text{C}$ )

|                              |           |      |    |
|------------------------------|-----------|------|----|
| Collector to Base Voltage    | $V_{CB0}$ | -60  | V  |
| Collector to Emitter Voltage | $V_{CEO}$ | -40  | V  |
| Emitter to Base Voltage      | $V_{EBO}$ | -5.0 | V  |
| Collector Current (DC)       | $I_C$     | -500 | mA |

Maximum Power Dissipation

|  |       |     |    |
|--|-------|-----|----|
| Total power Dissipation<br>at $25^\circ\text{C}$ Ambient Temperature | $P_T$ | 150 | mW |
|--|-------|-----|----|

Maximum Temperatures

|                           |           |             |                  |
|---------------------------|-----------|-------------|------------------|
| Junction Temperature      | $T_j$     | 150         | $^\circ\text{C}$ |
| Storage Temperature Range | $T_{stg}$ | -55 to +150 | $^\circ\text{C}$ |

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )**


| CHARACTERISTIC               | SYMBOL          | MIN. | TYP.  | MAX.  | UNIT | TEST CONDITIONS                                      |
|------------------------------|-----------------|------|-------|-------|------|--|
| Collector Cutoff Current     | $I_{CBO}$       |      |       | -100  | nA   | $V_{CB} = -40\text{ V}, I_E = 0$                     |
| Emitter Cutoff Current       | $I_{EBO}$       |      |       | -100  | nA   | $V_{EB} = -4.0\text{ V}, I_C = 0$                    |
| DC Current Gain              | $h_{FE1}^*$     | 75   | 140   | 300   |      | $V_{CE} = -2.0\text{ V}, I_C = -150\text{ mA}$       |
| DC Current Gain              | $h_{FE2}^*$     | 20   | 50    |       |      | $V_{CE} = -2.0\text{ V}, I_C = -150\text{ mA}$       |
| Collector Saturation Voltage | $V_{CE(sat)}^*$ |      | -0.45 | -0.75 | V    | $I_C = -500\text{ mA}, I_B = -50\text{ mA}$          |
| Base Saturation Voltage      | $V_{BE(sat)}^*$ |      | -1.0  | -1.30 | V    | $I_C = -500\text{ mA}, I_B = -50\text{ mA}$          |
| Gain Bandwidth Product       | $f_T$           | 150  | 400   |       | MHz  | $V_{CE} = -10\text{ V}, I_E = 20\text{ mA}$          |
| Output Capacitance           | $C_{ob}$        |      | 5.0   | 8.0   | pF   | $V_{CB} = -10\text{ V}, I_E = 0, f = 1.0\text{ MHz}$ |
| Turn-on Time                 | $t_{on}$        |      | 25    |       | ns   | $V_{CC} = -30\text{ V}$                              |
| Storage Time                 | $t_{stg}$       |      | 70    |       | ns   | $I_C = 150\text{ mA}$                                |
| Turn-off Time                | $t_{off}$       |      | 100   |       | ns   | $I_{B1} = -I_{B2} = 15\text{ mA}$                    |

\* Pulsed:  $PW \leq 350\ \mu\text{s}$ , Duty Cycle  $\leq 2\%$


**$h_{FE}$  Classification**

| Making    | Y12       | Y13        | Y14        |
|-----------|-----------|------------|------------|
| $h_{FE1}$ | 75 to 150 | 100 to 200 | 150 to 300 |


SWITCHING TIME TEST CIRCUIT

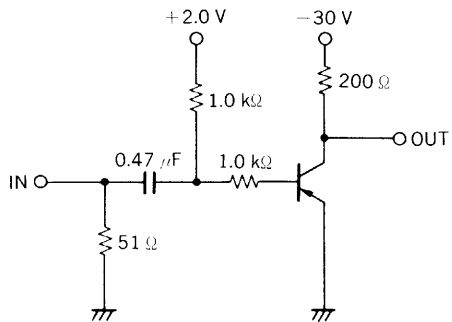


$t_{on}$  SWITCHING

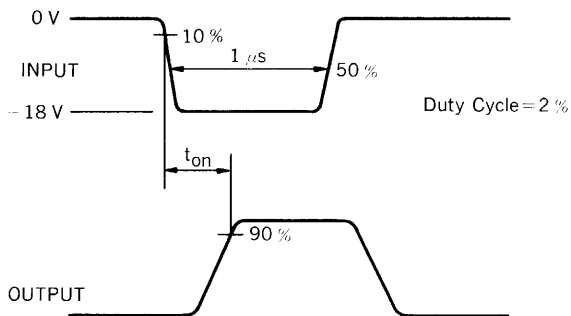

VOLTAGE WAVEFORMS


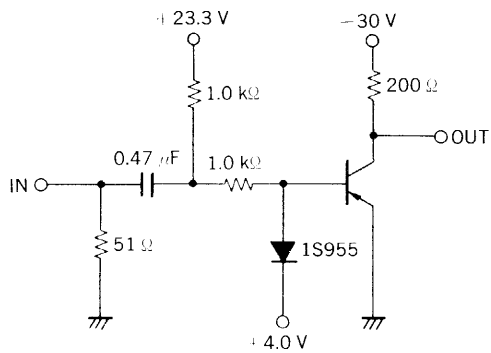


$t_{stg}$ ,  $t_{off}$  SWITCHING

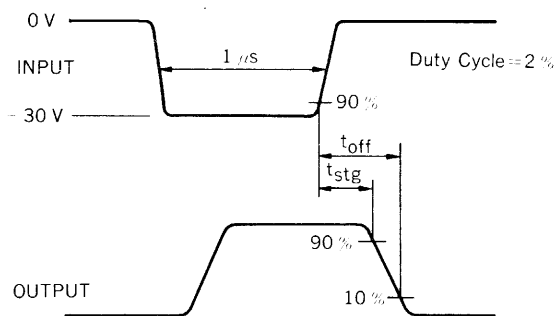


VOLTAGE WAVEFORMS


TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

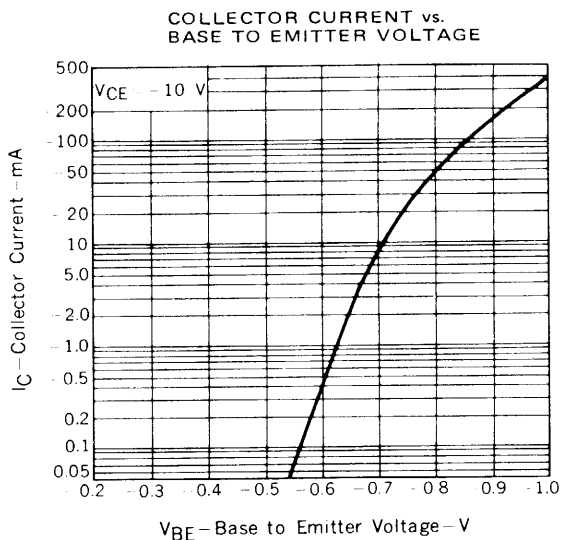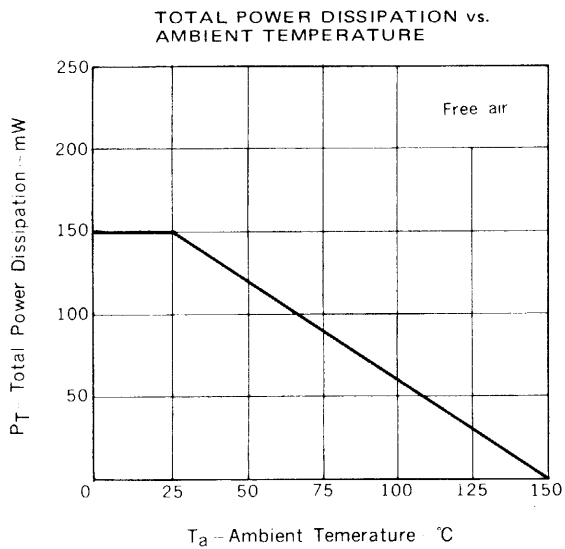


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

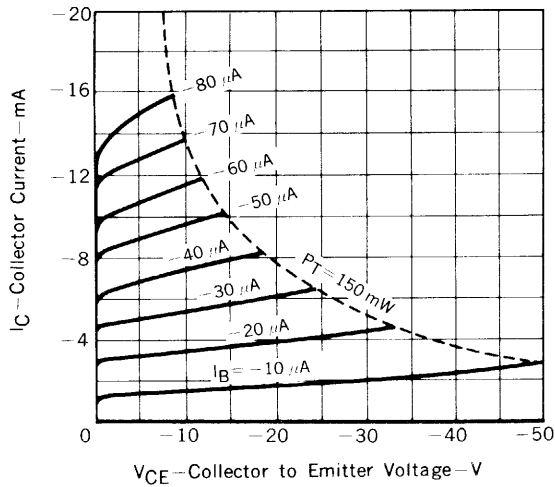


BASE AND COLLECTOR SATURATION VOLTAGE vs. COLLECTOR CURRENT

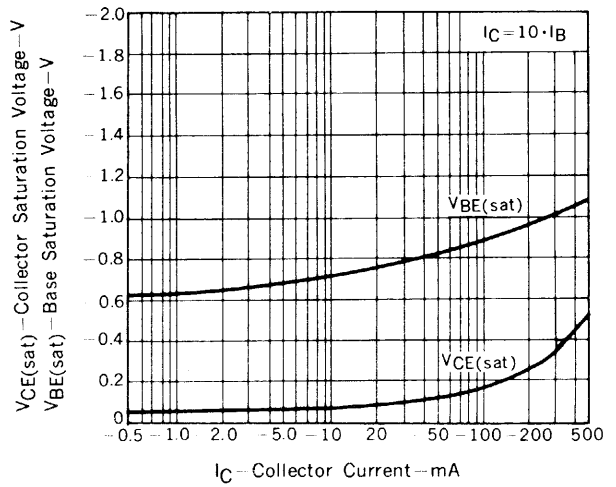


DC CURRENT GAIN vs. COLLECTOR CURRENT

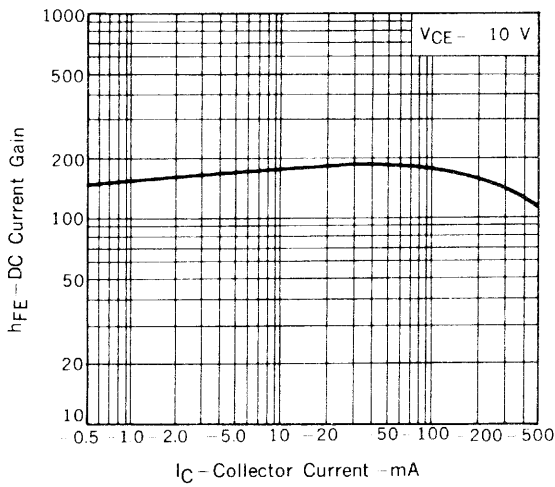


GAIN BANDWIDTH PRODUCT vs. EMITTER CURRENT

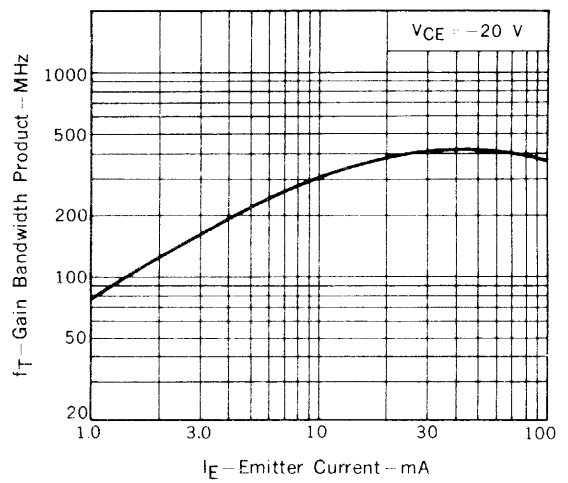


INPUT AND OUTPUT CAPACITANCE vs. REVERSE VOLTAGE

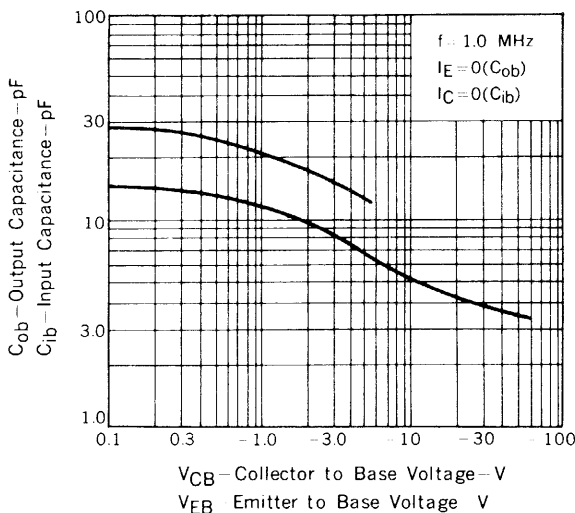


DELAY TIME vs. COLLECTOR CURRENT

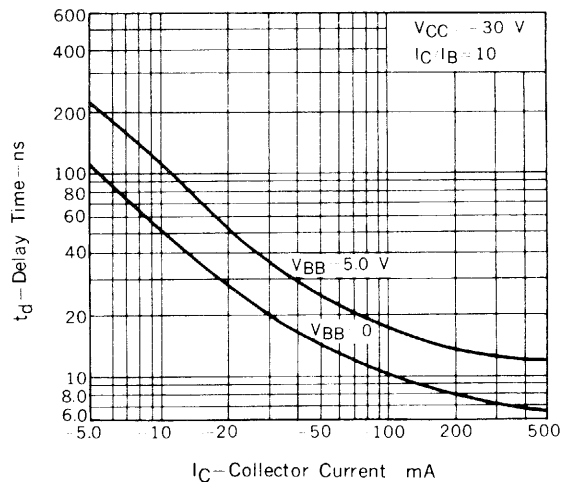

RISE TIME vs. COLLECTOR CURRENT

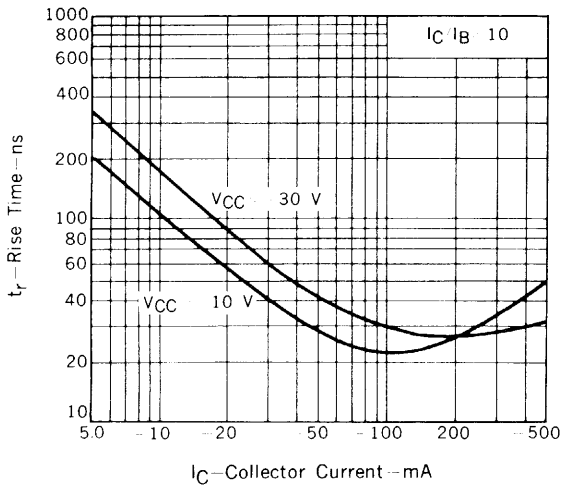

STORAGE TIME vs. COLLECTOR CURRENT

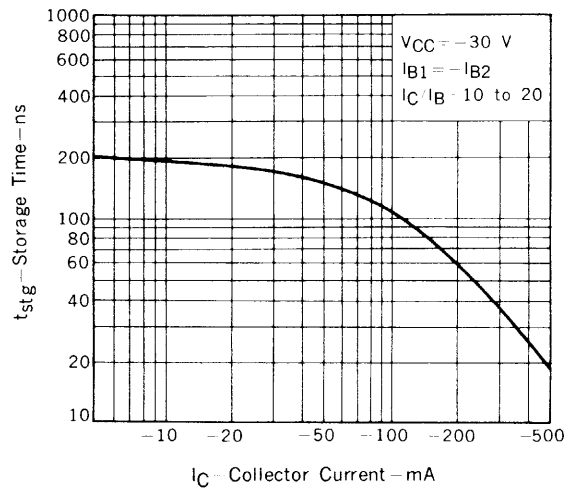

FALL TIME vs. COLLECTOR CURRENT

