



## 2SB1387

SILICON PNP EPITAXIAL  
 LOW FREQUENCY POWER AMPLIFIER  
 Complementary pair with 2SD1978

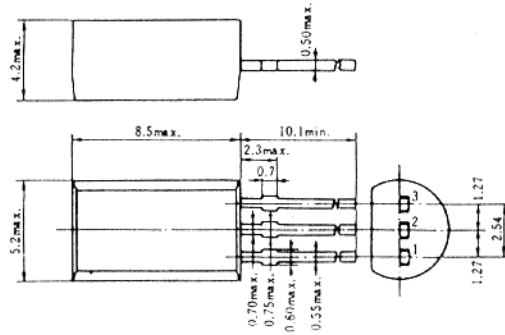


(JEDEC TO-92 MOD.)



### ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Item	Symbol	2SB1387	Unit
Collector to base voltage	V <sub>CB0</sub>	-120	V
Collector to emitter voltage	V <sub>CEO</sub>	-120	V
Emitter to base voltage	V <sub>EBO</sub>	-7	V
Collector current	I <sub>C</sub>	-1.5	A
Collector peak current	i <sub>C(peak)</sub>	-3.0	A
C to E diode forward current	I <sub>D</sub>	1.5	A
Collector power dissipation	P <sub>C</sub>	0.9	W
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C

### MAXIMUM COLLECTOR DISSIPATION CURVE

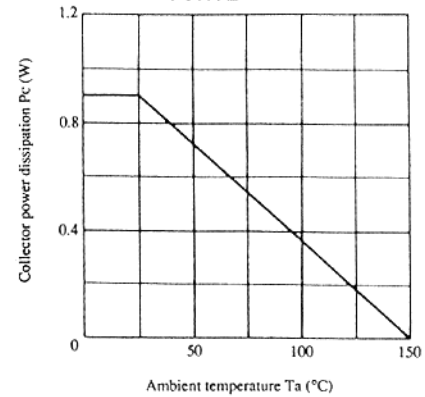


### ■ ELECTRICAL CHARACTERISTICS (Ta=25°C)

Item	Symbol	Test Condition	min.	typ.	max.	Unit
Collector to base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -0.1mA, I <sub>E</sub> = 0	-120	—	—	V
Collector to emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = -10mA, R <sub>BE</sub> = ∞	-120	—	—	V
Emitter to base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = -50mA, I <sub>C</sub> = 0	-7	—	—	V
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = -100V, I <sub>E</sub> = 0	—	—	-1	μA
	I <sub>CEO</sub>	V <sub>CE</sub> = -100V, R <sub>BE</sub> = ∞	—	—	-10	μA
DC current transfer ratio	h <sub>FE</sub>	V <sub>CE</sub> = -3V, I <sub>C</sub> = -1A*	2000	—	10000	
Collector to emitter saturation voltage	V <sub>CE(sat)1</sub>	I <sub>C</sub> = -1A, I <sub>B</sub> = -1mA*	—	—	-1.5	V
	V <sub>CE(sat)2</sub>	I <sub>C</sub> = -1.5A, I <sub>B</sub> = -1.5mA*	—	—	-2.0	V
Base to emitter saturation voltage	V <sub>BE(sat)1</sub>	I <sub>C</sub> = -1A, I <sub>B</sub> = -1mA*	—	—	-2.0	V
	V <sub>BE(sat)2</sub>	I <sub>C</sub> = -1.5A, I <sub>B</sub> = -1.5mA*	—	—	-2.5	V
C to E diode forward voltage	V <sub>D</sub>	I <sub>D</sub> = 1.5A*	—	—	3.0	V


\* Pulse Test

## 2SB1387


### AREA OF SAFE OPERATION

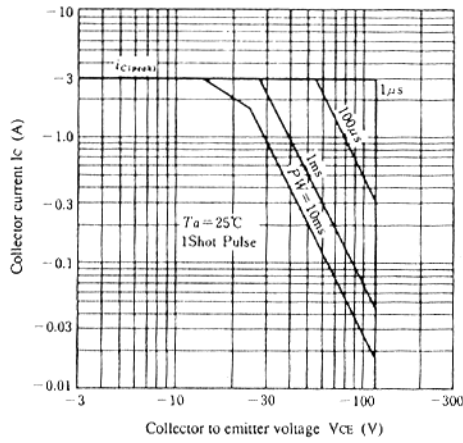


### TYPICAL OUTPUT CHARACTERISTICS

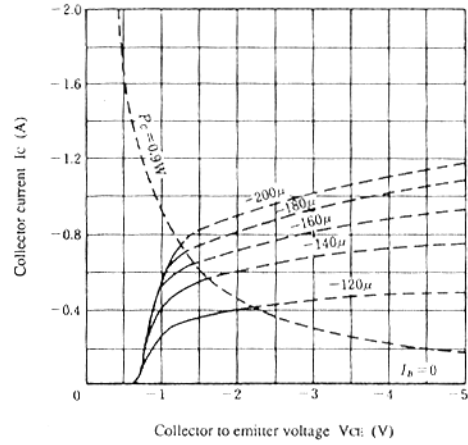

### DC CURRENT TRANSFER RATIO VS. COLLECTOR CURRENT

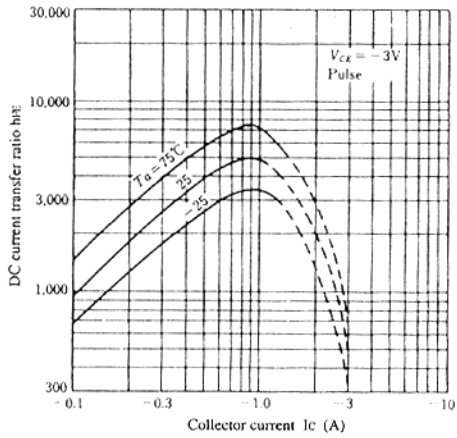

### SATURATION VOLTAGE VS. COLLECTOR CURRENT

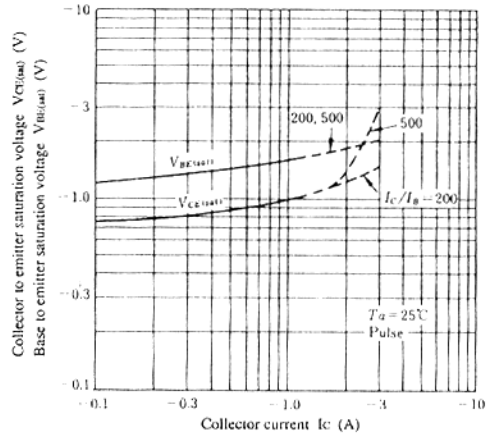

### TRANSIENT THERMAL RESISTANCE

