

2SC5628

Silicon NPN Epitaxial
High Frequency Amplifier / Oscillator

HITACHI


ADE-208-979A (Z)
2nd. Edition
April 2001

Features

- Super compact package;
(1.4 × 0.8 × 0.59mm)
- High power gain and low noise figure;
(PG = 9 dB, NF = 1.1 dB typ, at f = 900 Mhz, V_{CE} = 1 V)

Outline

MFPAK



1. Emitter
2. Base
3. Collector

Note: Marking is "XZ-".





Absolute Maximum Ratings (Ta = 25°C)




| Item | Symbol | Ratings | Unit |
|------------------------------|-----------|-------------|------|
| Collector to base voltage | V_{CBO} | 15 | V |
| Collector to emitter voltage | V_{CEO} | 8 | V |
| Emitter to base voltage | V_{EBO} | 1.5 | V |
| Collector current | I_C | 50 | mA |
| Collector power dissipation | P_c | 80 | mW |
| Junction temperature | T_j | 150 | °C |
| Storage temperature | T_{stg} | -55 to +150 | °C |

Electrical Characteristics (Ta = 25°C)


| Item | Symbol | Min | Typ | Max | Unit | Test Conditions |
|-------------------------------------|---------------|-----|------|------|---------|--|
| Collector to base breakdown voltage | $V_{(BR)CBO}$ | 15 | — | — | V | $I_C = 10\mu A, I_E = 0$ |
| Collector cutoff current | I_{CBO} | — | — | 1 | μA | $V_{CB} = 12V, I_E = 0$ |
| Collector cutoff current | I_{CEO} | — | — | 1 | mA | $V_{CE} = 8V, R_{BE} = \infty$ |
| Emitter cutoff current | I_{EBO} | — | — | 10 | μA | $V_{EB} = 1.5V, I_C = 0$ |
| DC current transfer ratio | h_{FE} | 50 | 100 | 160 | V | $V_{CE} = 1V, I_C = 5mA$ |
| Collector output capacitance | C_{ob} | — | 0.55 | 0.85 | pF | $V_{CB} = 1V, I_E = 0$ $f = 1MHz$ |
| Gain bandwidth product | f_T | 6 | 9 | — | GHz | $V_{CE} = 1V, I_C = 5mA$ |
| Power gain | PG | 11 | 14 | — | dB | $V_{CE} = 1V, I_C = 5mA$ $f = 900MHz$ |
| Noise figure | NF | — | 1.1 | 2.0 | dB | $V_{CE} = 1V, I_C = 5mA$ $f = 900MHz$ |

Main Characteristics

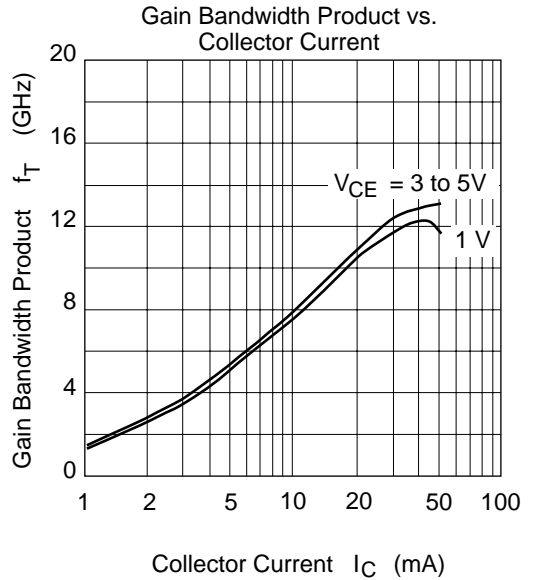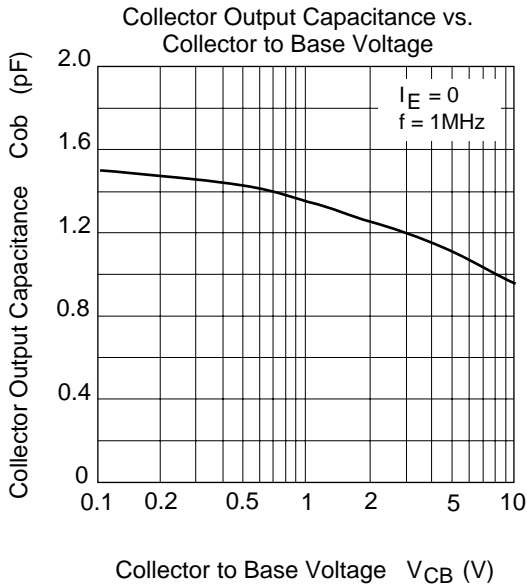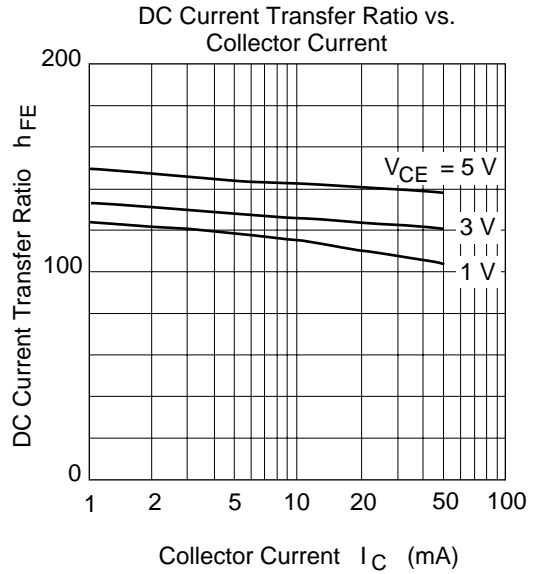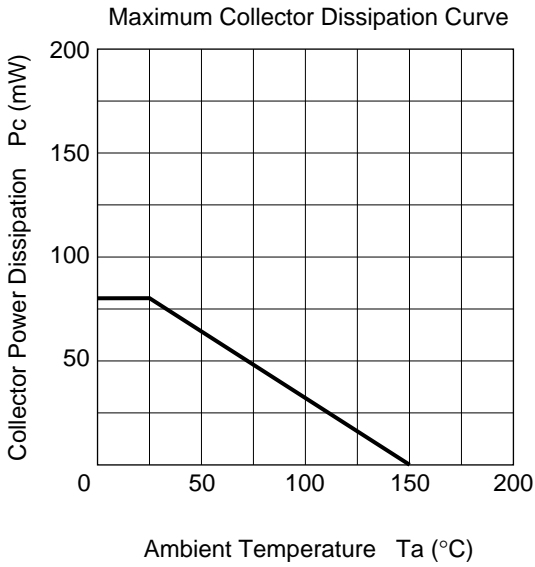

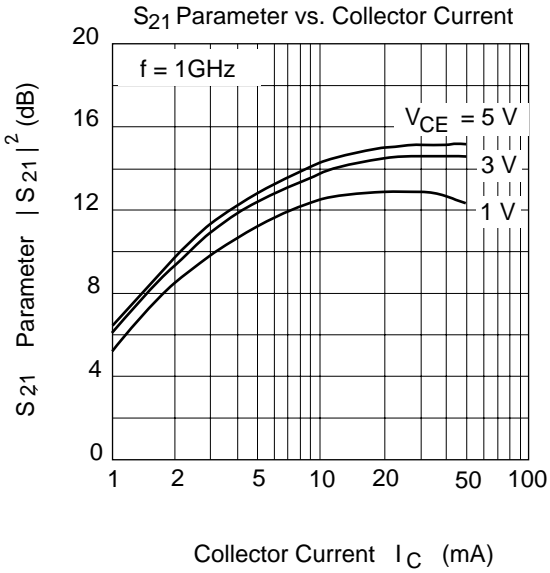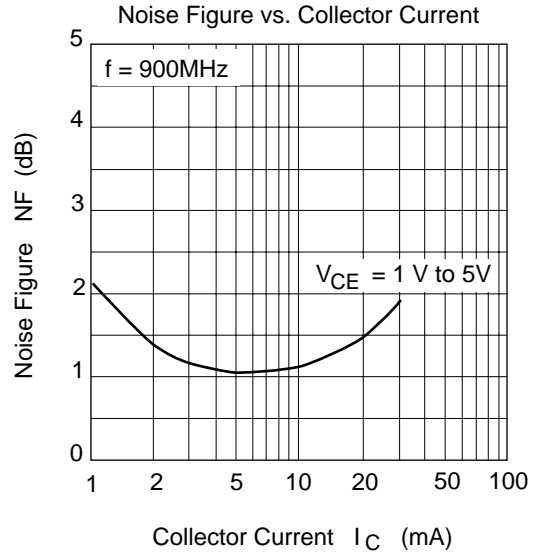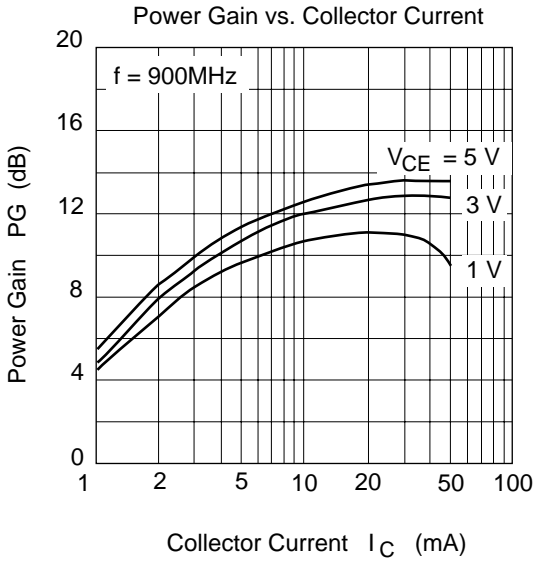

S11 Parameter vs. Frequency

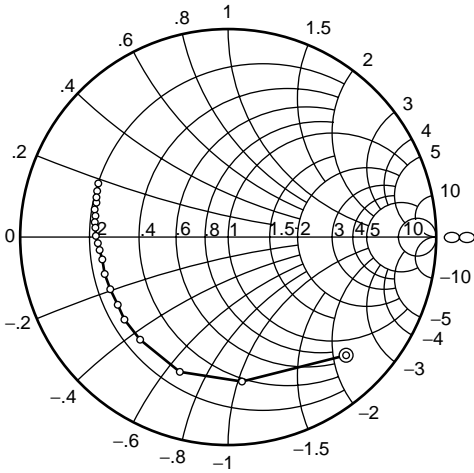


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S21 Parameter vs. Frequency

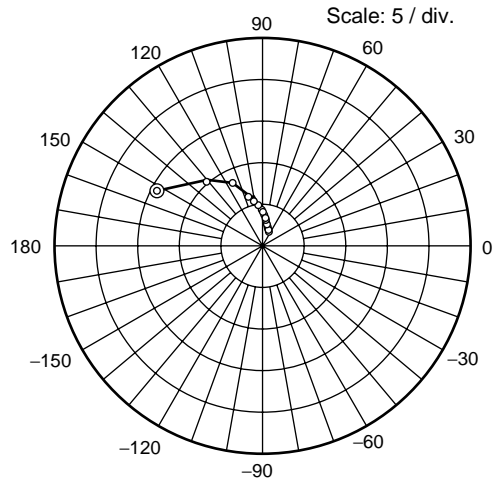


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S12 Parameter vs. Frequency

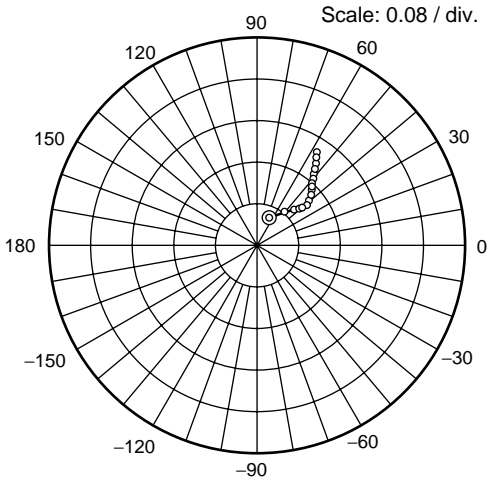


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S22 Parameter vs. Frequency

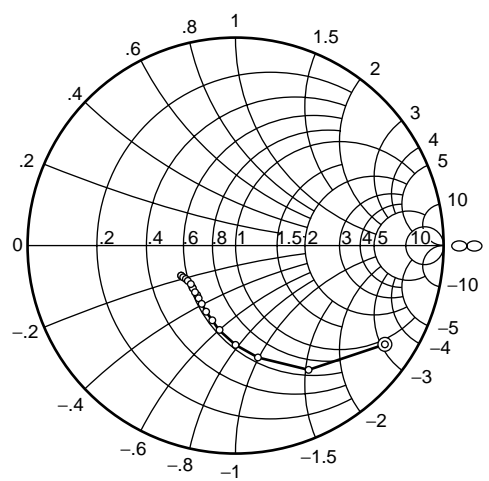


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S11 Parameter vs. Frequency

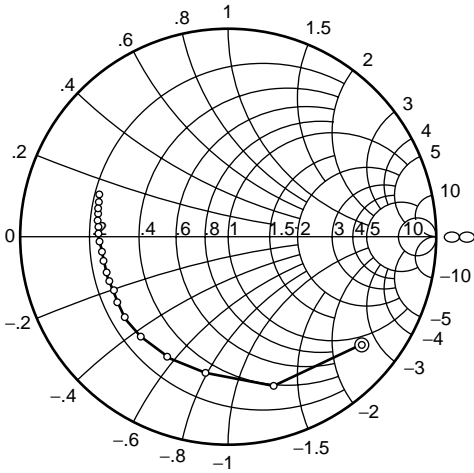


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S21 Parameter vs. Frequency

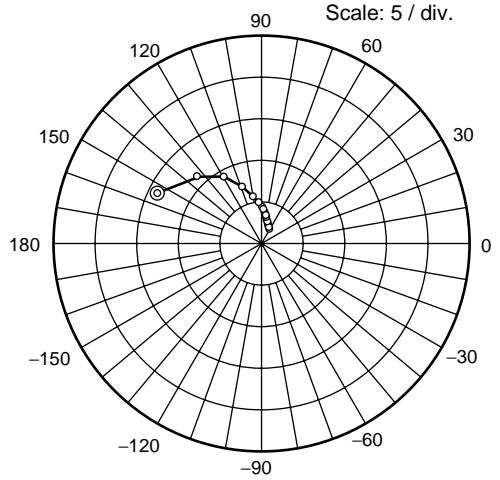


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S12 Parameter vs. Frequency

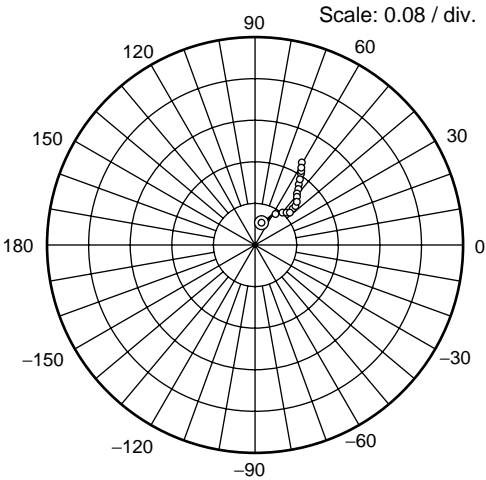


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S22 Parameter vs. Frequency

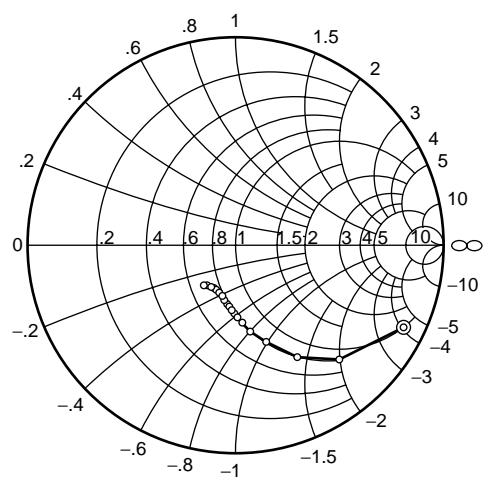

Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



Sparameter ($V_{CE} = 1 \text{ V}$, $I_C = 5 \text{ mA}$, $Z_o = 50 \Omega$)


| f (MHz) | S11 | | S21 | | S12 | | S22 | |
|---------|-------|--------|-------|-------|--------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100 | 0.815 | -46.1 | 13.63 | 152.2 | 0.0509 | 67.0 | 0.882 | -32.5 |
| 200 | 0.734 | -84.6 | 10.68 | 130.6 | 0.0834 | 51.0 | 0.695 | -58.5 |
| 300 | 0.692 | -111.2 | 8.23 | 116.8 | 0.0998 | 42.9 | 0.550 | -76.0 |
| 400 | 0.665 | -127.4 | 6.58 | 107.9 | 0.108 | 39.5 | 0.459 | -88.5 |
| 500 | 0.650 | -139.6 | 5.44 | 101.4 | 0.114 | 38.0 | 0.399 | -98.1 |
| 600 | 0.644 | -148.8 | 4.61 | 96.3 | 0.120 | 38.3 | 0.360 | -105.7 |
| 700 | 0.640 | -155.6 | 4.03 | 92.2 | 0.124 | 39.0 | 0.333 | -112.2 |
| 800 | 0.641 | -161.6 | 3.56 | 88.6 | 0.128 | 39.9 | 0.315 | -117.8 |
| 900 | 0.638 | -166.9 | 3.20 | 85.3 | 0.134 | 41.8 | 0.301 | -122.4 |
| 1000 | 0.638 | -171.6 | 2.90 | 82.2 | 0.138 | 43.5 | 0.292 | -126.7 |
| 1100 | 0.643 | -175.1 | 2.66 | 79.6 | 0.143 | 44.4 | 0.286 | -130.2 |
| 1200 | 0.643 | -178.5 | 2.46 | 77.2 | 0.149 | 46.2 | 0.280 | -133.6 |
| 1300 | 0.648 | 178.5 | 2.28 | 74.9 | 0.154 | 47.8 | 0.279 | -135.6 |
| 1400 | 0.651 | 175.4 | 2.15 | 72.8 | 0.161 | 49.1 | 0.278 | -138.6 |
| 1500 | 0.658 | 173.2 | 2.03 | 70.5 | 0.168 | 50.9 | 0.277 | -140.9 |
| 1600 | 0.663 | 170.0 | 1.92 | 68.5 | 0.174 | 51.8 | 0.279 | -143.3 |
| 1700 | 0.667 | 167.2 | 1.82 | 66.7 | 0.182 | 53.2 | 0.281 | -145.0 |
| 1800 | 0.669 | 165.0 | 1.74 | 64.4 | 0.189 | 54.6 | 0.282 | -147.1 |
| 1900 | 0.673 | 163.1 | 1.67 | 63.2 | 0.196 | 55.5 | 0.286 | -149.3 |
| 2000 | 0.682 | 161.0 | 1.60 | 61.4 | 0.204 | 56.4 | 0.289 | -150.6 |

Sparameter ($V_{CE} = 3 \text{ V}$, $I_C = 5 \text{ mA}$, $Z_o = 50 \Omega$)

| f (MHz) | S11 | | S21 | | S12 | | S22 | |
|---------|-------|--------|-------|-------|--------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100 | 0.826 | -39.3 | 14.04 | 155.5 | 0.0412 | 69.9 | 0.906 | -25.8 |
| 200 | 0.746 | -74.6 | 11.47 | 134.9 | 0.0700 | 54.9 | 0.738 | -47.3 |
| 300 | 0.685 | -100.5 | 9.14 | 121.1 | 0.0864 | 46.7 | 0.591 | -61.9 |
| 400 | 0.646 | -117.4 | 7.41 | 111.9 | 0.0950 | 43.0 | 0.490 | -71.9 |
| 500 | 0.627 | -130.7 | 6.19 | 104.8 | 0.101 | 41.3 | 0.419 | -79.9 |
| 600 | 0.617 | -141.0 | 5.27 | 99.6 | 0.107 | 41.3 | 0.369 | -85.7 |
| 700 | 0.606 | -149.0 | 4.61 | 95.0 | 0.111 | 41.6 | 0.333 | -90.7 |
| 800 | 0.598 | -155.4 | 4.09 | 91.6 | 0.115 | 42.5 | 0.307 | -95.3 |
| 900 | 0.605 | -161.3 | 3.67 | 87.7 | 0.120 | 44.3 | 0.287 | -99.0 |
| 1000 | 0.604 | -166.1 | 3.35 | 84.7 | 0.124 | 45.6 | 0.273 | -102.6 |
| 1100 | 0.604 | -170.6 | 3.06 | 81.8 | 0.129 | 46.8 | 0.262 | -106.0 |
| 1200 | 0.607 | -174.2 | 2.83 | 79.5 | 0.134 | 49.0 | 0.253 | -108.8 |
| 1300 | 0.605 | -178.2 | 2.62 | 77.1 | 0.139 | 50.4 | 0.249 | -111.0 |
| 1400 | 0.608 | 178.9 | 2.47 | 74.9 | 0.145 | 51.9 | 0.245 | -114.3 |
| 1500 | 0.618 | 175.5 | 2.32 | 72.7 | 0.152 | 53.4 | 0.242 | -116.6 |
| 1600 | 0.622 | 172.4 | 2.19 | 70.7 | 0.157 | 54.8 | 0.241 | -118.9 |
| 1700 | 0.627 | 170.0 | 2.08 | 68.9 | 0.164 | 56.2 | 0.241 | -121.3 |
| 1800 | 0.629 | 166.9 | 1.99 | 66.7 | 0.171 | 57.6 | 0.242 | -123.4 |
| 1900 | 0.633 | 164.3 | 1.90 | 65.2 | 0.177 | 58.7 | 0.243 | -125.9 |
| 2000 | 0.641 | 162.3 | 1.82 | 63.4 | 0.186 | 59.5 | 0.245 | -127.7 |

Package Dimensions

Unit: mm

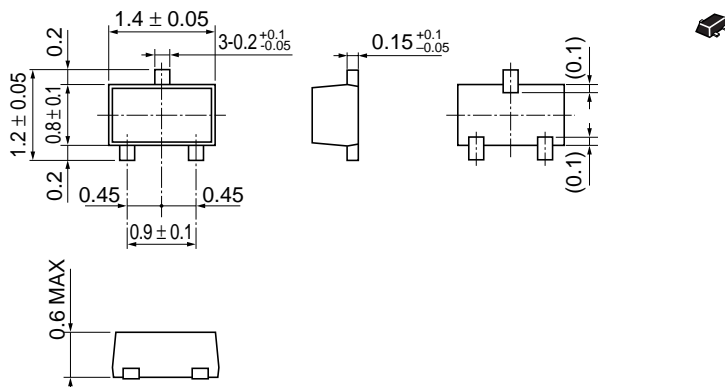

| | |
|------------------------|----------|
| Hitachi Code | MFPAK |
| JEDEC | — |
| EIAJ | — |
| Mass (reference value) | 0.0016 g |

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica : <http://semiconductor.hitachi.com/>
 Europe : <http://www.hitachi-eu.com/hel/ecg>
 Asia : <http://sicapac.hitachi-asia.com>
 Japan : <http://www.hitachi.co.jp/Sicd/indx.htm>

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe Ltd.
Electronic Components Group
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585200

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00
Singapore 049318
Tel: <65>-538-6533/538-8577
Fax: <65>-538-6933/538-3877
URL: <http://www.hitachi.com.sg>

Hitachi Asia Ltd.
(Taipei Branch Office)
4/F, No. 167, Tun Hwa North Road
Hung-Kuo Building
Taipei (105), Taiwan
Tel: <886>-(2)-2718-3666
Fax: <886>-(2)-2718-8180
Telex: 23222 HAS-TP
URL: <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon
Hong Kong
Tel: <852>-(2)-735-9218
Fax: <852>-(2)-730-0281
URL: <http://semiconductor.hitachi.com.hk>

Copyright ' Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.

Colophon 4.0