



26D6

PENTAGRID CONVERTER

MINIATURE TYPE

For use with 12-cell storage-battery supply

26D6

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:


Voltage	26.5	ac or dc volts
Current	0.07	amp

Direct Interelectrode Capacitances:

Grid #3 to All Other Electrodes (RF Input)	7.5	μf
Plate to All Other Electrodes (Mixer Output)	14	μf
Grid #1 to All Other Electrodes (Osc. Input)	5.8	μf
Grid #3 to Plate	0.30 max.	μf
Grid #1 to Grid #3	0.15 max.	μf
Grid #1 to Plate	0.03 max.	μf
Grid #1 to External Shield and All Other Electrodes Except Cathode & Grid No.5	2.9	μf
Grid #1 to Cathode & Grid #5	2.8 [▲]	μf
Cathode to External Shield and All Other Electrodes Except Grid #1	15.5	μf

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-1/8"
Maximum Seated Length	1-7/8"
Length from Base Seat to Bulb Top (excluding tip)	1-1/2" ± 3/32"
Maximum Diameter	3/4"
Bulb	T-5-1/2
Base	Miniature Button 7-Pin
Basing Designation for BOTTOM VIEW	7CH
Pin 1 - Grid No.1	Pin 5 - Plate
Pin 2 - Cathode, Grid No.5	Pin 6 - Grid No.2, Grid No.4
Pin 3 - Heater	Pin 7 - Grid No.3
Pin 4 - Heater	



CONVERTER

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	300 max. volts
GRIDS-No.2 & No.4 (SCREEN) VOLTAGE	100 max. volts
GRIDS-No.2 & No.4 SUPPLY VOLTAGE	300 max. volts
PLATE DISSIPATION	1.0 max. watt
GRIDS-No.2 & No.4 DISSIPATION	1.0 max. watt
TOTAL CATHODE CURRENT	14 max. ma.
GRID-No.3 (CONTROL GRID) VOLTAGE:	
Negative bias value:	50 max. volts
Positive bias value:	0 max. volts
PEAK HEATER-CATHODE VOLTAGE:	
Heater negative with respect to cathode	90 max. volts
Heater positive with respect to cathode	90 max. volts

● with external shield connected to cathode.
▲ with external shield connected to other electrodes.

JUNE 20, 1946

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA

26D6



26D6

PENTAGRID CONVERTER

Characteristics - Separate Excitation: [□]				
Plate Voltage.	26.5	100	250	volts
Grids-No.2 & No.4 Voltage. .	26.5	100	100	volts
Grid-No.3 Voltage.	-0.5	-1.5	-1.5	volts
Grid-No.1 (Oscillator- Grid) Resistor	20000	20000	20000	ohms
Plate Resistance (Approx.) .	-	0.5	1.0	megohm
Conversion Transconductance	270	455	475	μmhos
Conversion Transconductance (Approx.)*	-	4	4	μmhos
Conversion Transconductance (Approx.)**	8	-	-	μmhos
Plate Current.	0.45	2.8	3.0	ma.
Grids-No.2 & No.4 Current. .	1.6	8.0	7.8	ma.
Grid-No.1 Current.	0.1	0.5	0.5	ma.
Total Cathode Current. . . .	2.15	11.3	11.3	ma.
Characteristics of Oscillator Section: [▲]				
Plate Voltage.	26.5	100	volts	
Grids-No.2 & No.4 Voltage.	26.5	100	volts	
Grid-No.3 Voltage.	0	0	volts	
Grid-No.1 Voltage.	0	0	volts	
Amplification Factor	-	22		
Transconductance	4500	7200	μmhos	
Plate Current.	5.5	27	ma.	
<p>□ The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.</p> <p>* With grid-No.3 bias of -30 volts.</p> <p>** With grid-No.3 bias of -6 volts.</p> <p>▲ Measured between grid No.1 and grids-No.2 and No.4 connected to plate (not oscillating).</p> <p style="text-align: center;"><i>The curves under Type 6BE6 also apply to the 26D6</i></p>				

JUNE 20, 1946

TUBE DIVISION

TENTATIVE DATA


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

26D6



26D6

OPERATION CHARACTERISTICS WITH SEPARATE OSCILLATOR EXCITATION

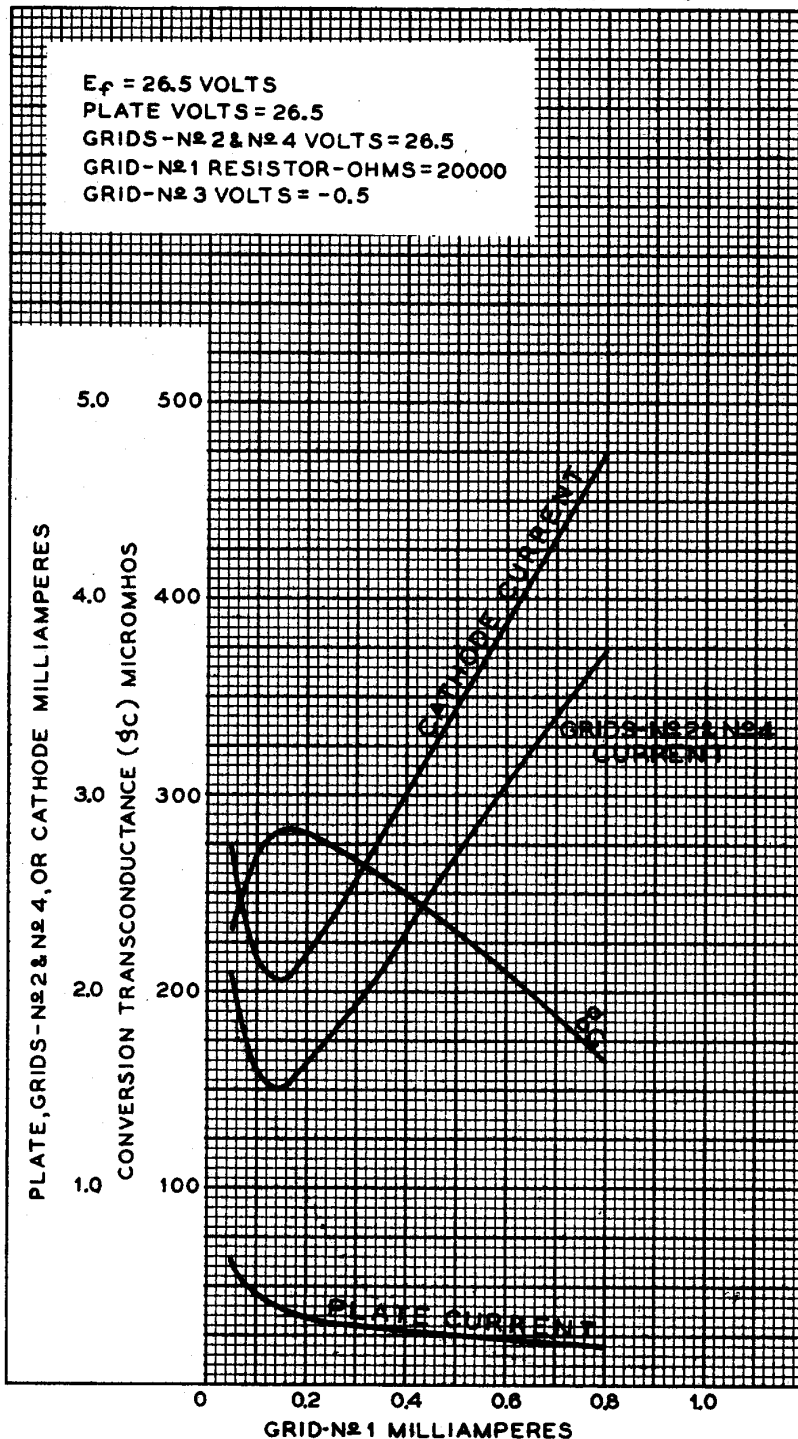

AUGUST 1, 1946

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6790




26D6

OPERATION CHARACTERISTICS
WITH SEPARATE OSCILLATOR EXCITATION

26D6

$E_f = 26.5$ VOLTS
PLATE VOLTS = 26.5
GRIDS-N \# 2 & N \# 4 VOLTS = 26.5
GRID-N \# 1 MILLIAMPERES = 0.1
GRID-N \# 1 RESISTOR-OHMS = 20000

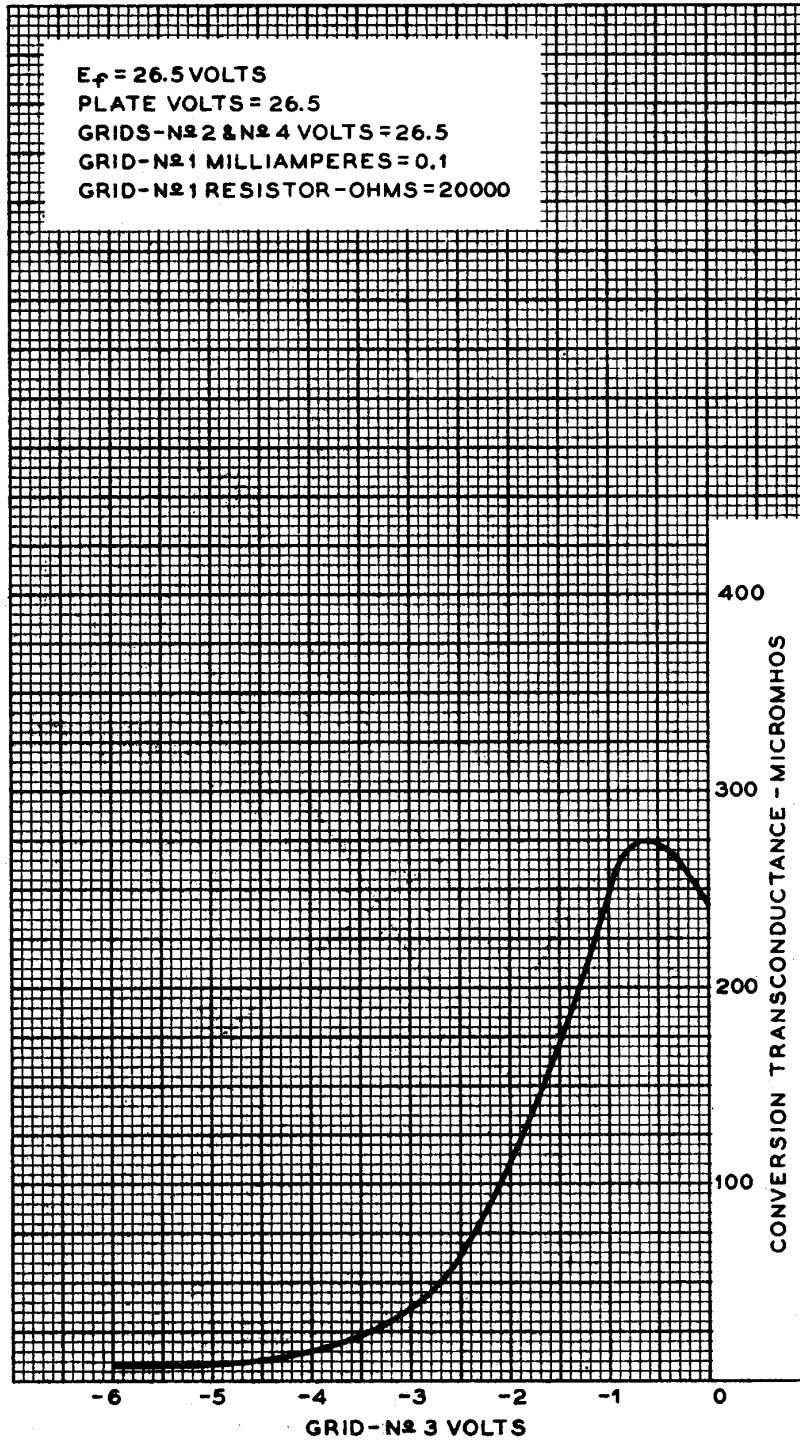

JULY 31, 1946

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6789