

<b>SANYO</b>	No.5049	2SA1898
		PNP Epitaxial Planar Silicon Transistor
		DC/DC Converter

**Applications**

- High-speed switching.

**Features**

- Adoption of FBET and MBIT processes.
- Large current capacity.
- Low collector-to-emitter saturation voltage.
- Fast switching speed.

**Absolute Maximum Ratings at Ta = 25°C**

			unit
Collector-to-Base Voltage	V <sub>CB0</sub>	-15	V
Collector-to-Emitter Voltage	V <sub>CEO</sub>	-15	V
Emitter-to-Base Voltage	V <sub>EBO</sub>	-5	V
Collector Current	I <sub>C</sub>	-3	A
Collector Current (Pulse)	I <sub>CP</sub>	-5	A
Base Current	I <sub>B</sub>	-600	mA
Collector Dissipation	P <sub>C</sub>	Mounted on ceramic board (250mm <sup>2</sup> × 0.8mm)	
		1.3	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55 to +150	°C

**Electrical Characteristics at Ta = 25°C**


			min	typ	max	unit
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = -12V, I <sub>E</sub> = 0			-1	μA
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = -3V, I <sub>C</sub> = 0			-1	μA
DC Current Gain	h <sub>FE</sub> (1)	V <sub>CE</sub> = -2V, I <sub>C</sub> = -0.5A	100*		280*	
	h <sub>FE</sub> (2)	V <sub>CE</sub> = -2V, I <sub>C</sub> = -3A	50			
Gain-Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> = -2V, I <sub>C</sub> = -0.3A		300		MHz
Output Capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -10V, f = 1MHz		28		pF
C-E Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -1.5A, I <sub>B</sub> = -75mA	-0.25		-0.5	V
B-E Saturation Voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = -1.5A, I <sub>B</sub> = -75mA	-0.95		-1.2	V
C-B Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -10μA, I <sub>E</sub> = 0	-15			V
C-E Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = -1mA, R <sub>BE</sub> = ∞	-15			V
E-B Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = -10μA, I <sub>C</sub> = 0	-5			V
Turn-ON time	t <sub>on</sub>	See specified Test Circuit.		30	60	ns
Storage Time	t <sub>stg</sub>	∞		100	200	ns
Turn-OFF time	t <sub>off</sub>	∞		120	220	ns

\* The 2SA1898 is classified by 500A h<sub>FE</sub> as follows:

100 R 200	140 S 280
-----------	-----------


Marking: AN

**Switching Time Test Circuit**








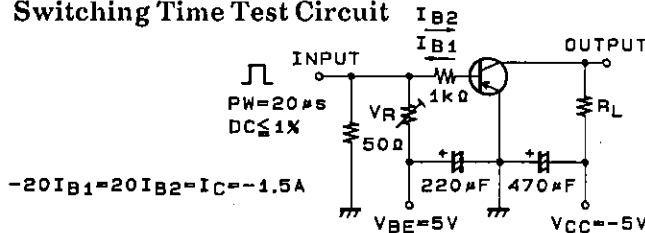





**Package Dimensions 2038A**

(unit: mm)

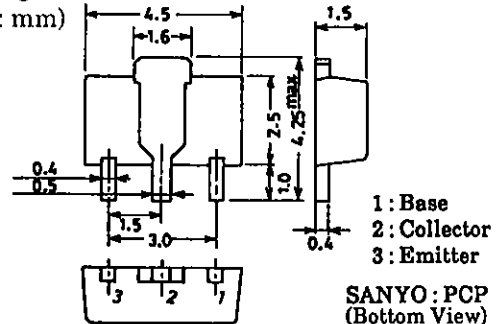

SANYO: PCP  
(Bottom View)

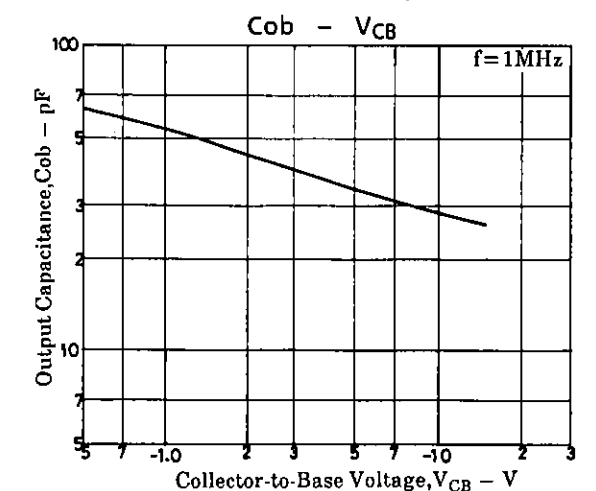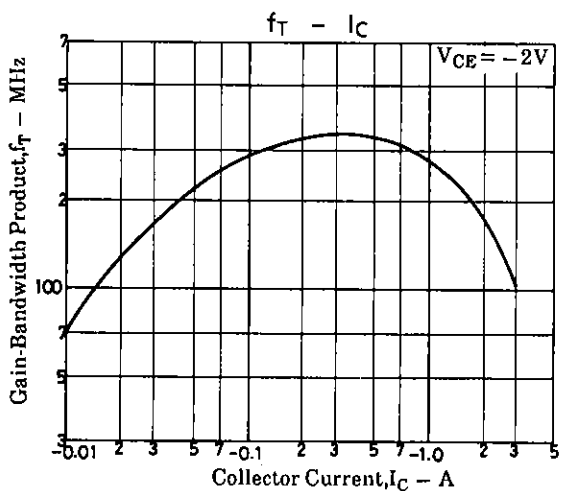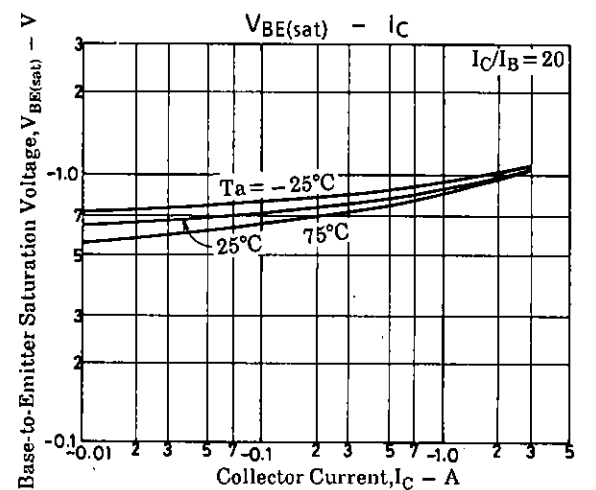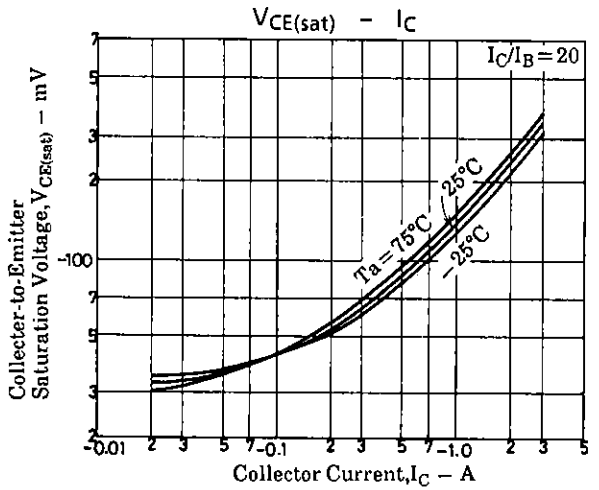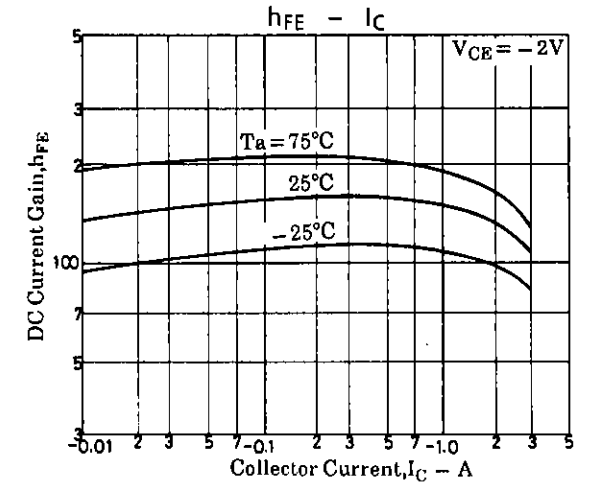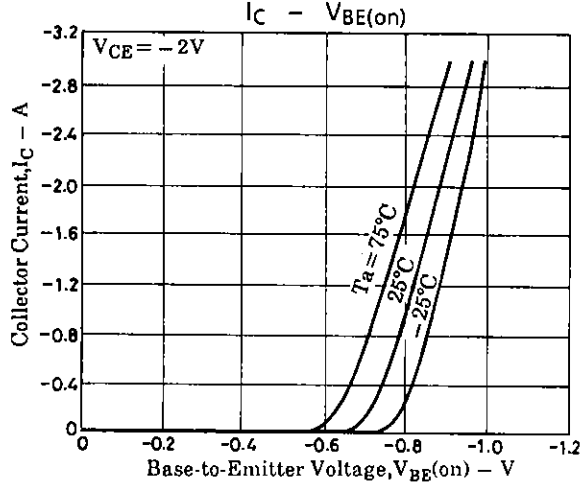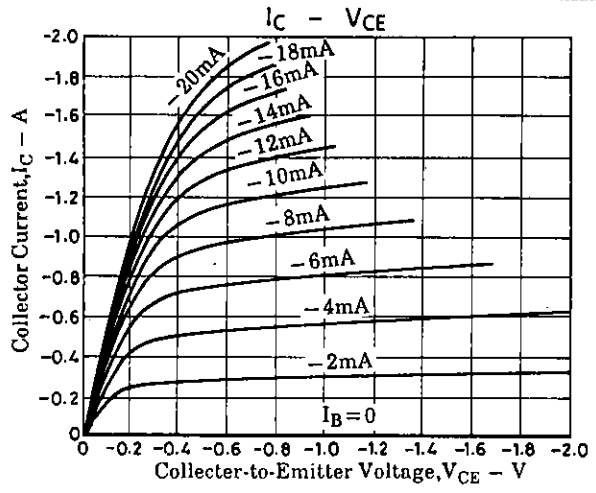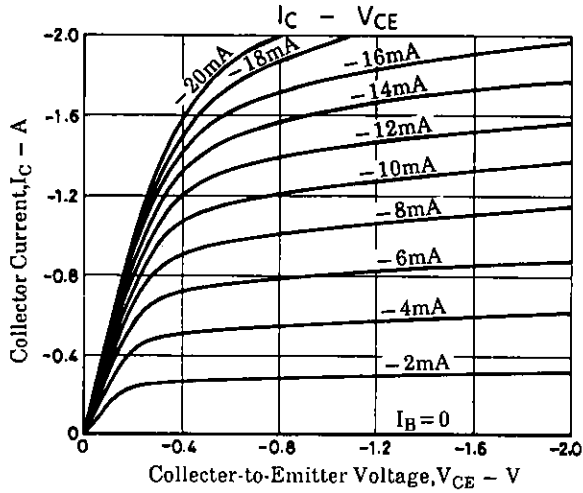

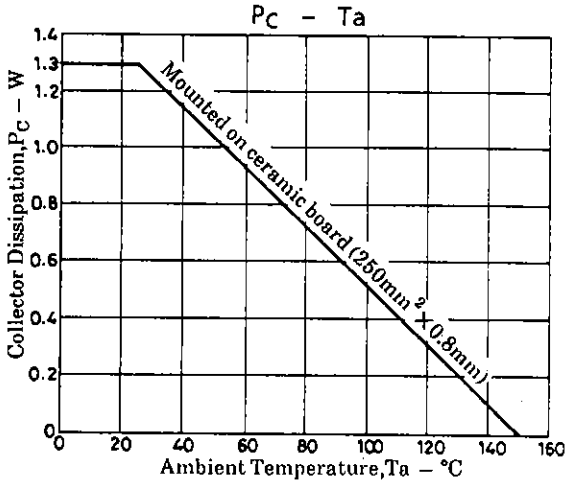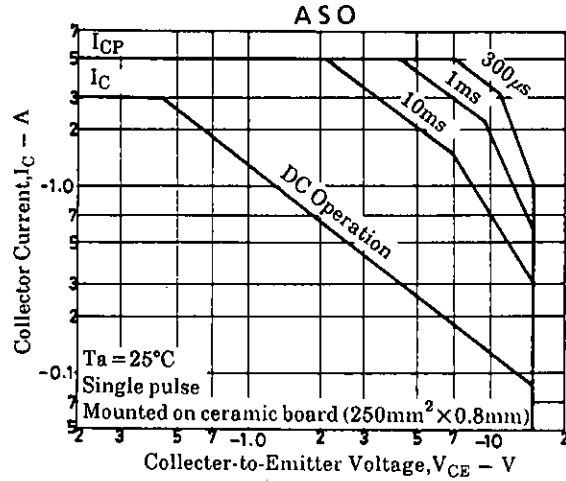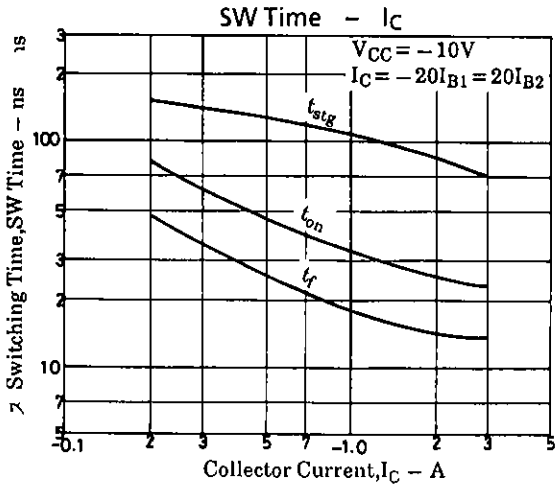

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.