

SANYO	No. 2019A	2SB1124/2SD1624
	PNP/NPN Epitaxial Planar Silicon Transistors High-Current Switching Applications	

Applications

- . Voltage regulators, relay drivers, lamp drivers, electrical equipment.

Features

- . Adoption of FBIT, MBIT processes.
- . Low collector-to-emitter saturation voltage.
- . Fast switching speed.
- . Large current capacity and wide ASO

(): 2SB1124

Absolute Maximum Ratings at Ta=25°C

			unit
Collector to Base Voltage	V_{CBO}	(-)60	V
Collector to Emitter Voltage	V_{CEO}	(-)50	V
Emitter to Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)3	A
Collector Current(Pulse)	I_{CP}	(-)6	A
Collector Dissipation	P_C	500	mW
	Mounted on ceramic board (250mm ² x 0.8mm)	1.5	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 to +150	°C

Electrical Characteristics at Ta=25°C

		min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=(-)40V, I_E=0$		(-)1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=(-)4V, I_C=0$		(-)1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE}=(-)2V, I_C=(-)100mA$	100*	560*	
	$h_{FE}(2)$	$V_{CE}=(-)2V, I_C=(-)3A$	35		
Gain-Bandwidth Product	f_T	$V_{CE}=(-)10V, I_C=(-)50mA$		150	MHz
Output Capacitance	c_{ob}	$V_{CB}=(-)10V, f=1MHz$		(39)	pF
				25	pF

Continued on next page.

*:The 2SB1124/2SD1624 are classified by 100mA h_{FE} as follows:


100 R	200	140 S	280	200 T	400	280 U	560
-------	-----	-------	-----	-------	-----	-------	-----

Marking 2SB1124:BG

2SD1624:DG

h_{FE} rank : R, S, T, U

Switching Time Test Circuit

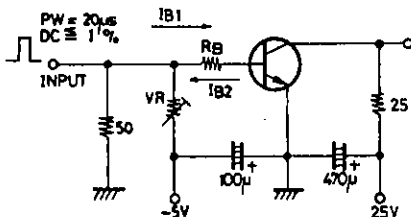


$10I_{B1} = -10I_{B2} = I_C = 1A$

(For PNP, the polarity is reversed.)

Unit (Resistance : Ω , Capacitance : F)

Package Dimensions 2038

(unit:mm)

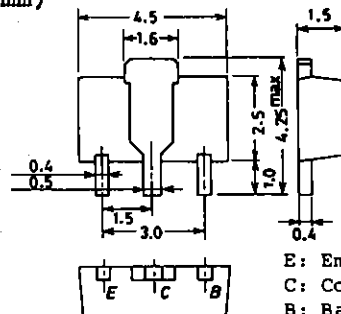

E: Emitter
C: Collector
B: Base

SANYO: PCP
(Bottom View)







SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN









2SB1124/2SD1624

Continued from preceding page.



			min	typ	max	unit
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)2A, I_B=(-)100mA$	(-0.35)	(-0.7)		V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)2A, I_B=(-)100mA$	(-0.94)	(-1.2)		V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	(-)	60		V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1mA, R_{BE}=\infty$	(-)	50		V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu A, I_C=0$	(-)	6		V
Turn-on Time	t_{on}	See specified Test Circuit.	(70)			ns
			"	70		ns
Storage Time	t_{stg}		"	(450)		ns
			"	650		ns
Fall Time	t_f		"	(35)		ns
			"	35		ns

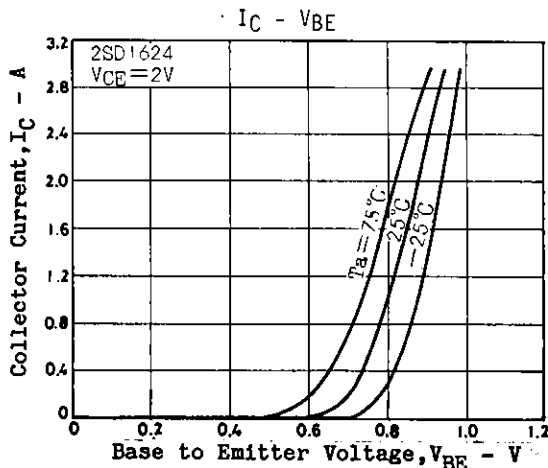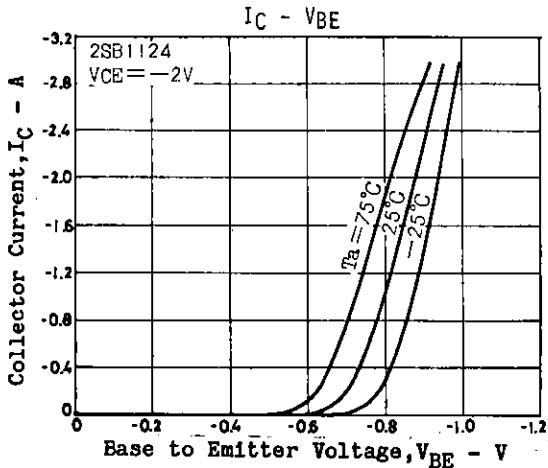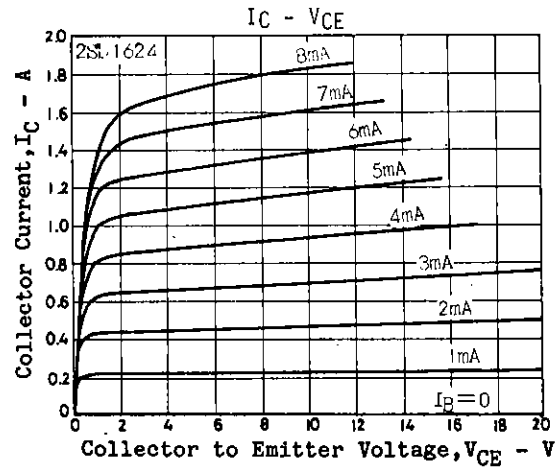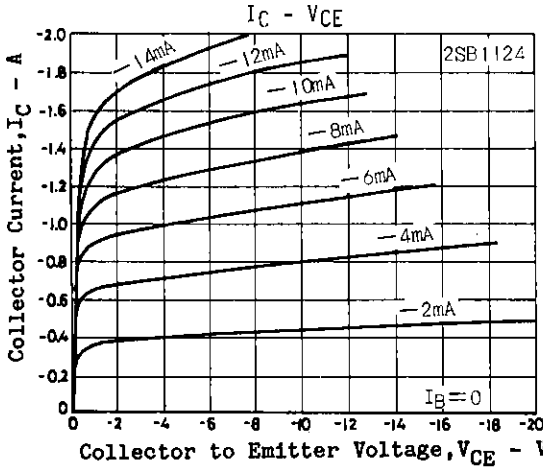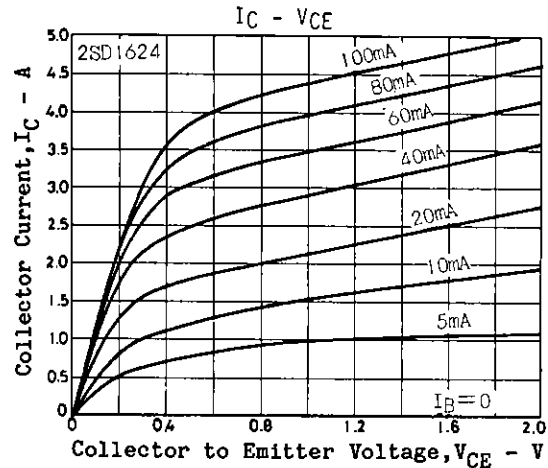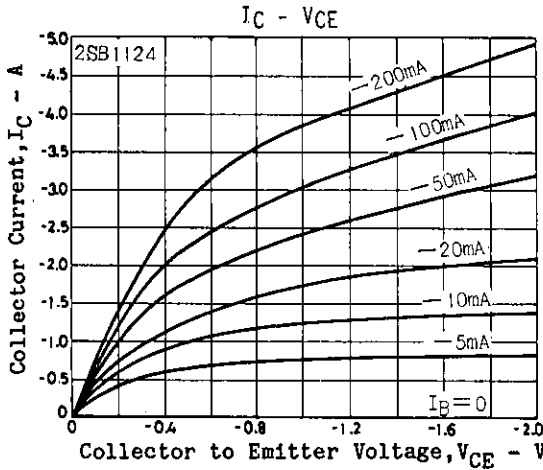

2SB1124/2SD1624

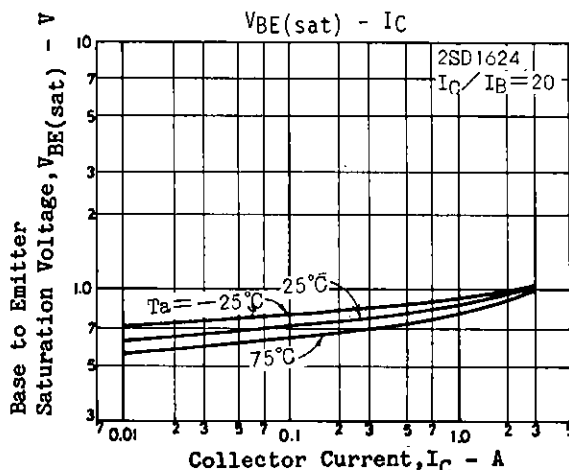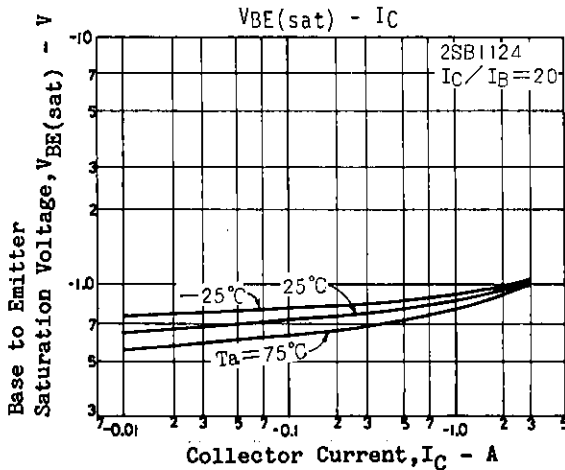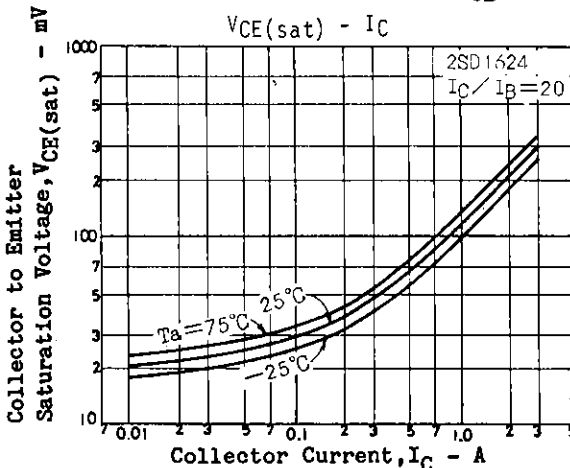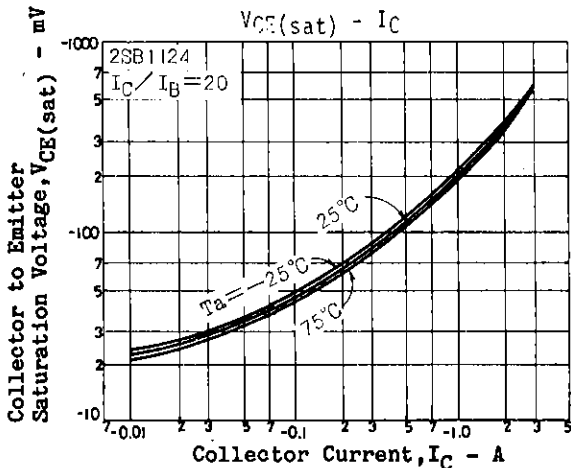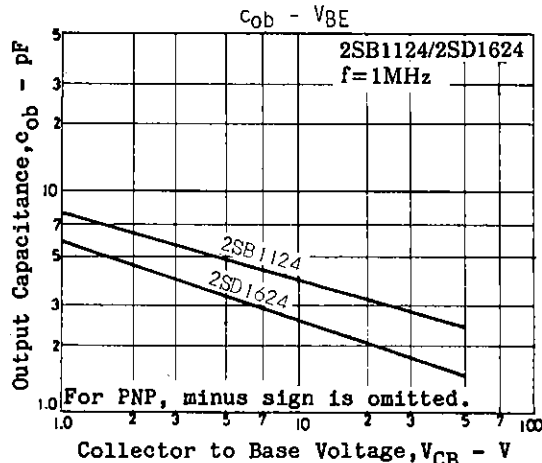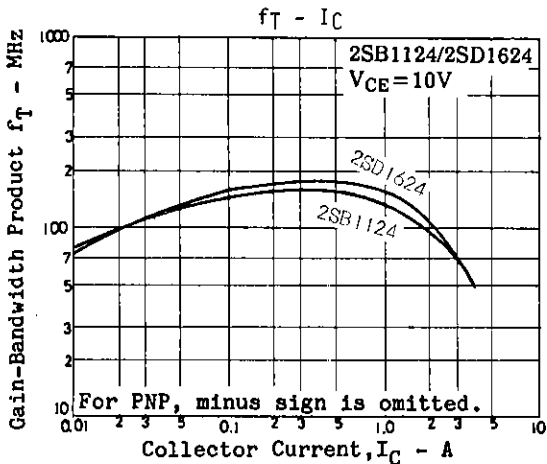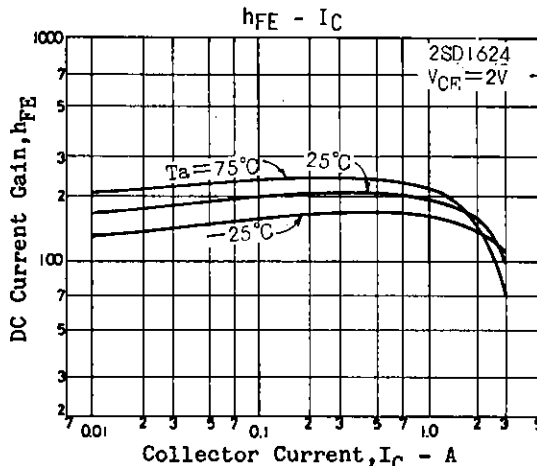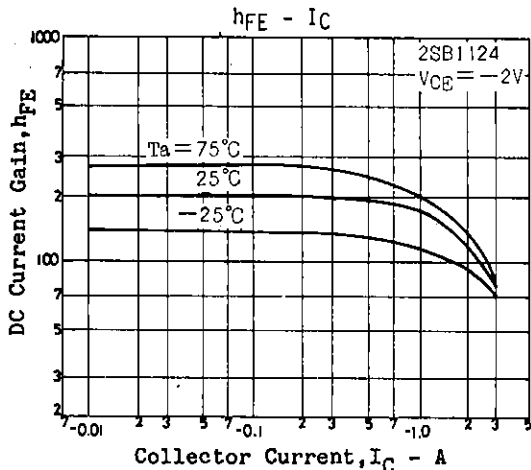

2SB1124/2SD1624

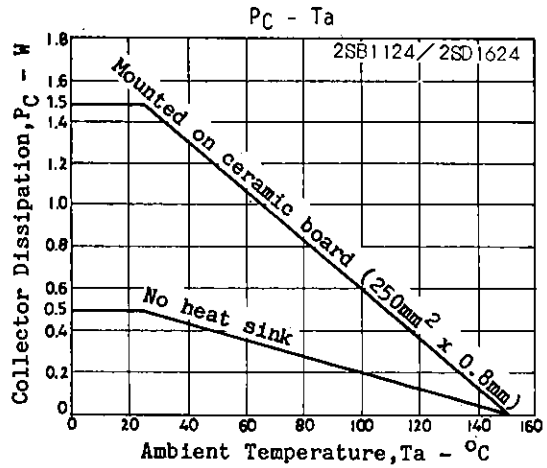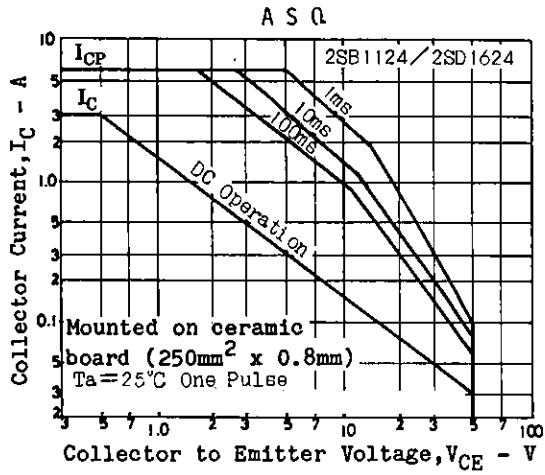

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.