

# 2SB953, 2SB953A

Silicon PNP epitaxial planar type

For low-voltage switching


Complementary to 2SD1444 and 2SD1444A

## Features

- Low collector to emitter saturation voltage  $V_{CE(sat)}$
- High-speed switching
- Full-pack package which can be installed to the heat sink with one screw

## Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ )

Parameter	Symbol	Rated	Unit	
Collector to base voltage	$V_{CBO}$	2SB953	-40	V
2SB953A		-50		
Collector to emitter voltage	$V_{CEO}$	2SB953	-20	V
2SB953A		-40		
Emitter to base voltage	$V_{EBO}$	-5	V	
Peak collector current	$I_{CP}$	-12	A	
Collector current	$I_C$	-7	A	
Collector power dissipation	$P_C$	$T_C=25^\circ\text{C}$	30	W
$T_a=25^\circ\text{C}$		2		
Junction temperature	$T_j$	150	$^\circ\text{C}$	
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$	

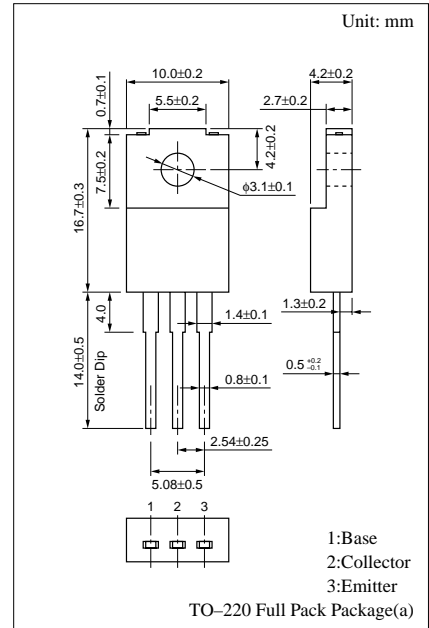

## Electrical Characteristics ( $T_C=25^\circ\text{C}$ )

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	$I_{CBO}$	2SB953	$V_{CB} = -40\text{V}, I_E = 0$		-50	$\mu\text{A}$
2SB953A		$V_{CB} = -50\text{V}, I_E = 0$		-50		
Emitter cutoff current	$I_{EBO}$	$V_{EB} = -5\text{V}, I_C = 0$			-50	$\mu\text{A}$
Collector to emitter voltage	$V_{CEO}$	2SB953	$I_C = -10\text{mA}, I_B = 0$	-20		V
2SB953A		-40				
Forward current transfer ratio	$h_{FE1}$	$V_{CE} = -2\text{V}, I_C = -0.1\text{A}$	45			
	$h_{FE2}^*$	$V_{CE} = -2\text{V}, I_C = -2\text{A}$	90		260	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -5\text{A}, I_B = -0.16\text{A}$			-0.6	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = -5\text{A}, I_B = -0.16\text{A}$			-1.5	V
Transition frequency	$f_T$	$V_{CE} = -10\text{V}, I_C = -0.5\text{A}, f = 10\text{MHz}$		150		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$		140		pF
Turn-on time	$t_{on}$	$I_C = -2\text{A}, I_{B1} = -66\text{mA}, I_{B2} = 66\text{mA}$		0.1		$\mu\text{s}$
Storage time	$t_{stg}$		0.5		$\mu\text{s}$	
Fall time	$t_f$		0.1		$\mu\text{s}$	

\* $h_{FE2}$  Rank classification

Rank	Q	P
$h_{FE2}$	90 to 180	130 to 260

Note: Ordering can be made by the common rank (PQ rank  $h_{FE2} = 90$  to 260) in the rank classification.

