

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07666 07-33-09

SILICON NPN EPITAXIAL TYPE (PCT PROCESS)


**2SC3258**

HIGH CURRENT SWITCHING APPLICATIONS.

INDUSTRIAL APPLICATIONS  
Unit in mm

FEATURES:

- Low Collector Saturation Voltage :  
:  $V_{CE(sat)}=0.4V(\text{Max.})$  at  $I_C=3A$
- High Speed Switching Time :  $t_{stg}=1.0\mu s(\text{Typ.})$
- Complementary to 2SA1293.

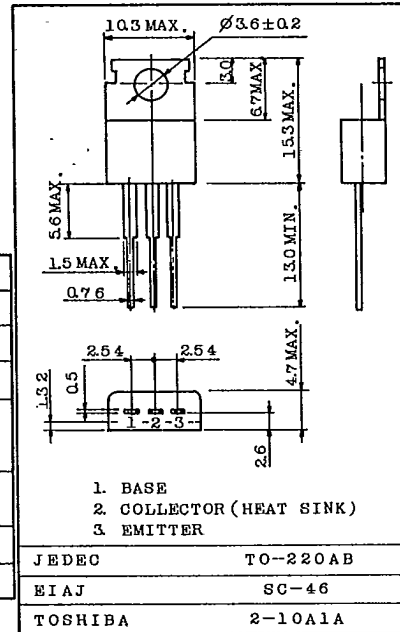

MAXIMUM RATINGS ( $T_a=25^\circ C$ )


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	100	V
Collector-Emitter Voltage	$V_{CEO}$	80	V
Emitter-Base Voltage	$V_{EBO}$	7	V
Collector Current	DC	$I_C$	5
	Pulse	$I_{CP}$	8
Collector Power Dissipation ( $T_c=25^\circ C$ )	$P_C$	30	W
Junction Temperature	$T_j$	150	$^\circ C$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ C$

- BASE
- COLLECTOR (HEAT SINK)
- EMITTER

JEDEC TO-220AB  
EIAJ SC-46  
TOSHIBA 2-10A1A

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=100V, I_E=0$	-	-	1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=7V, I_C=0$	-	-	1	$\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	80	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=1V, I_C=1A$	70	-	240	
	$h_{FE(2)}$	$V_{CE}=1V, I_C=3A$	40	-	-	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	-	0.2	0.4	V
	Base-Emitter	$V_{BE(sat)}$	-	0.9	1.2	
Transition Frequency	$f_T$	$V_{CE}=4V, I_C=1A$	-	120	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	80	-	pF
Switching Time	Turn-on Time	$t_{on}$	-	0.2	-	$\mu s$
	Storage Time	$t_{stg}$	-	1.0	-	
	Fall Time	$t_f$	-	0.1	-	

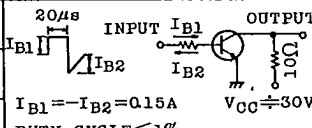







Note :  $h_{FE(1)}$  Classification O : 70 ~ 140, Y : 120 ~ 240

TOSHIBA CORPORATION





9097250 TOSHIBA (DISCRETE/OPTO)

56C 07667 DT-33-09

2SC3258

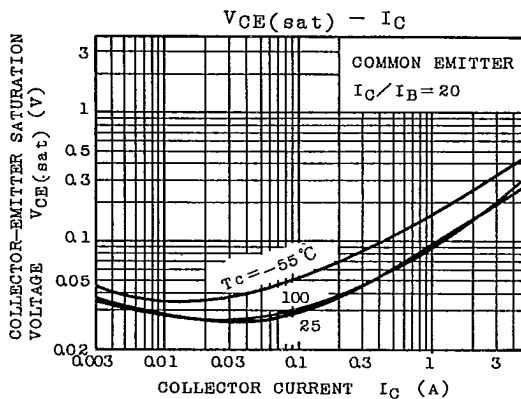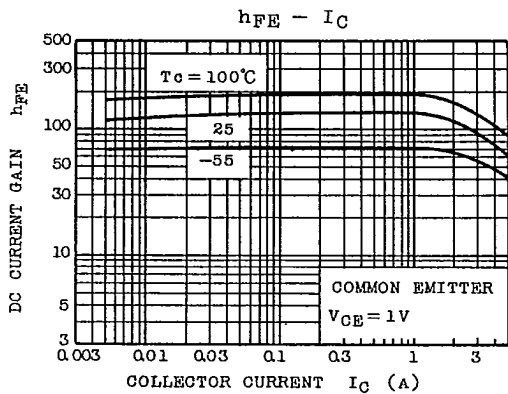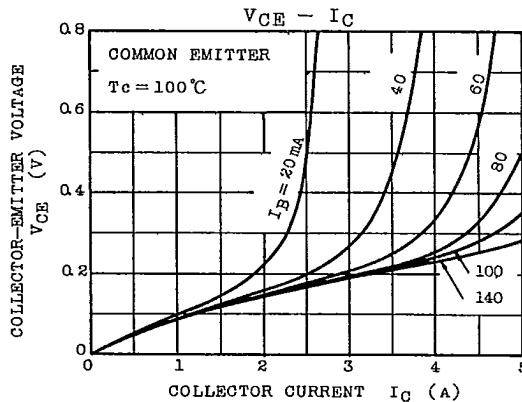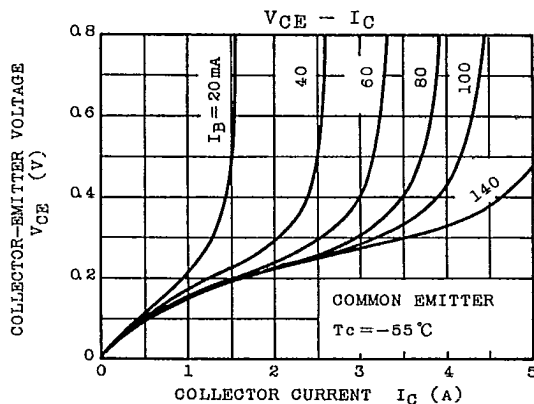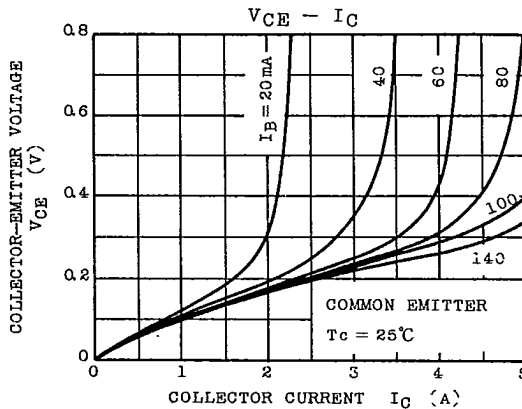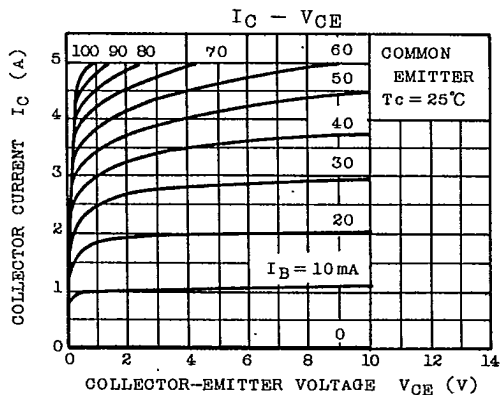

TOSHIBA CORPORATION

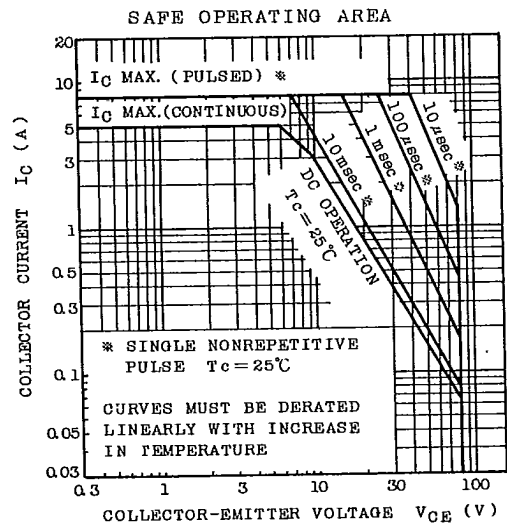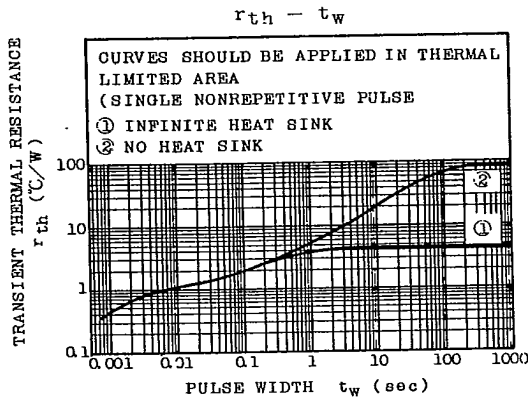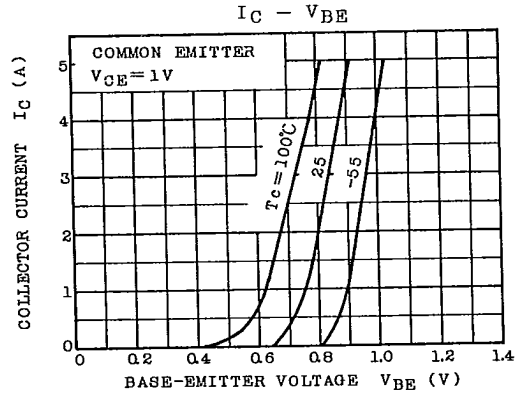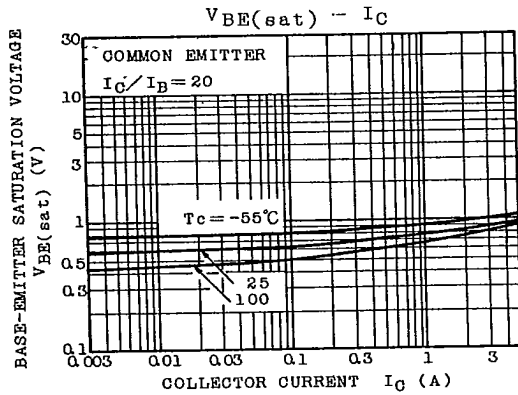

TOSHIBA CORPORATION