

SANYO

No.3975

2SC4736

NPN Epitaxial Planar Silicon Transistor

High h_{FE} , Low-Frequency General-Purpose
Amp Applications

Features

- Large current ($I_C = 2A$).
- Adoption of MBIT process.
- High DC current gain ($h_{FE} = 800$ to 3200).
- Low collector-to-emitter saturation voltage ($V_{CE(sat)} \leq 0.5V$).
- High Emitter to Base Voltage ($V_{EBO} \geq 15V$).
- Large power type such as $P_C = 1.5W$ when used without heatsink.
- It is possible to make appliances more compact because its height on board is 9.5mm.
- Effective in automatic inserting and counting stocked amount because of being provided for radial tapping.

Absolute Maximum Ratings at $T_a = 25^\circ C$


			unit
Collector to Base Voltage	V_{CBO}	80	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	15	V
Collector Current	I_C	2	A
Peak Collector Current	i_{cp}	4	A
Base Current	I_B	400	mA
Collector Dissipation	P_C	1.5	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature	T_{stg}	-55 to +150	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 50V, I_E = 0$			1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 10V, I_C = 0$			1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = 5V, I_C = 500mA$	800	1500	3200	
	$h_{FE(2)}$	$V_{CE} = 5V, I_C = 1A$	600			
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_C = 50mA$		170		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10V, f = 1MHz$		24		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = 1A, I_B = 20mA$	0.2	0.5		V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = 1A, I_B = 20mA$	0.87	1.2		V

Continued on next page.


Package Dimensions 2084
(unit: mm)

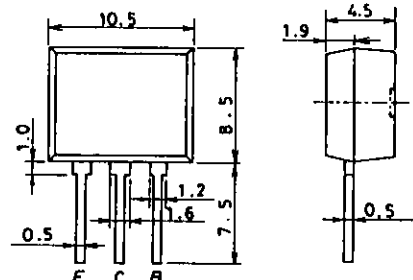

E : Emitter
C : Collector
B : Base

SANYO: FLP


Switching Time Test Circuit

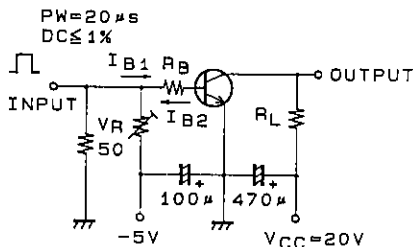

A00467







$100I_{B1} = -100I_{B2} = I_C = 700mA$





Unit (resistance: Ω , capacitance: F)



Continued from preceding page.

			min	typ	max	unit
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	80			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1mA, R_{BE} = \infty$	60			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_C = 10\mu A, I_C = 0$	15			V
Turn-ON Time	t_{on}	See specified Test Circuit.		0.23		μs
Storage Time	t_{stg}	"		2.7		μs
Fall Time	t_f	"		0.75		μs

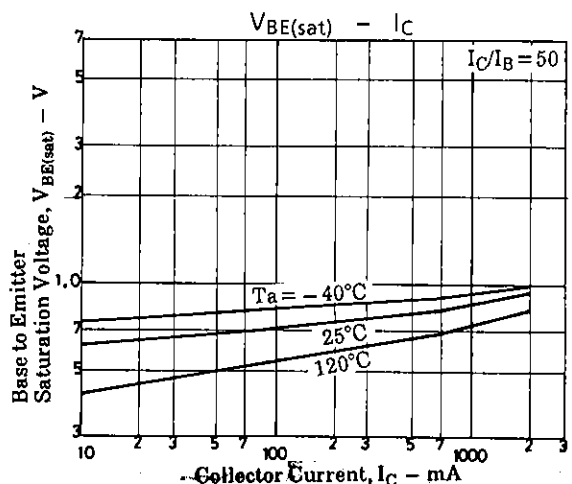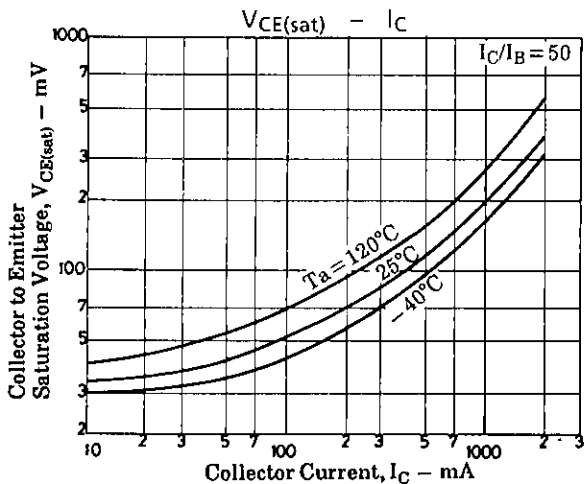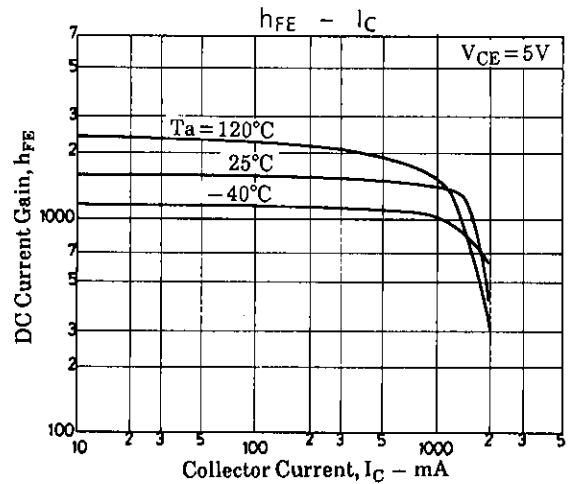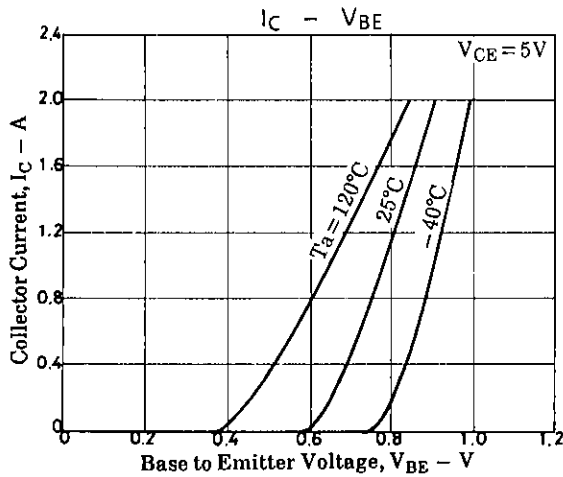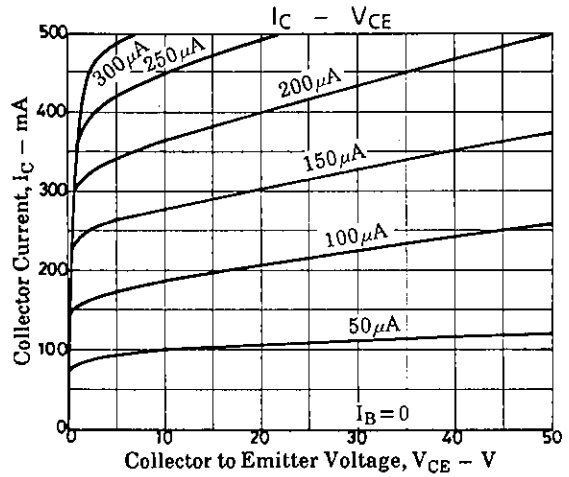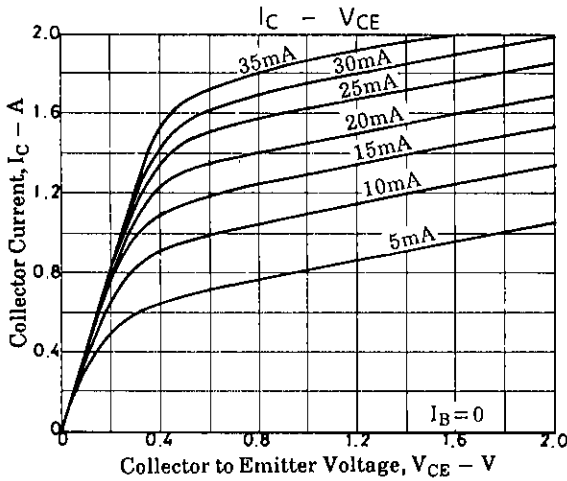

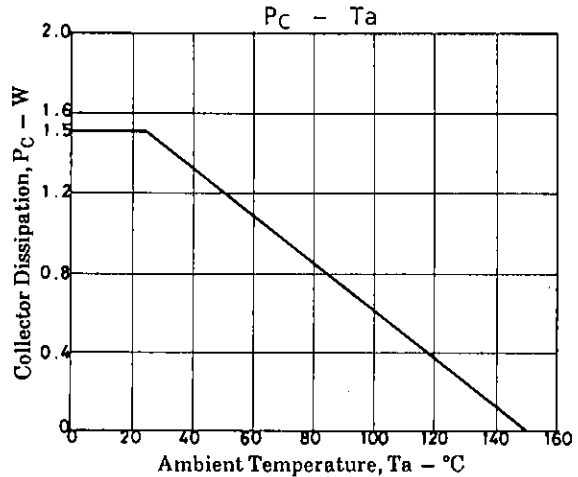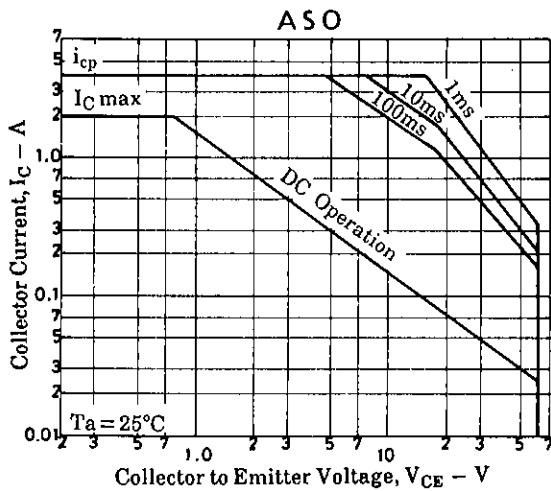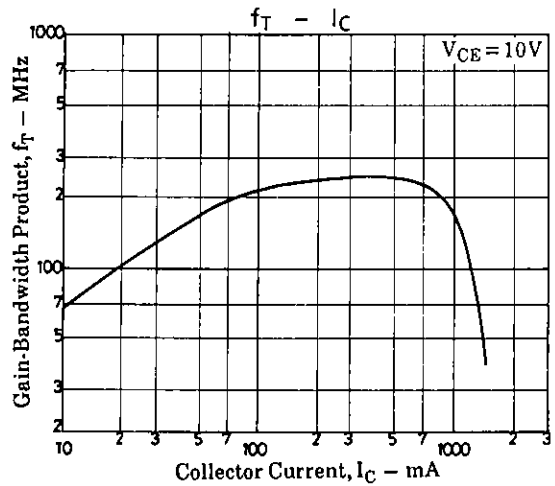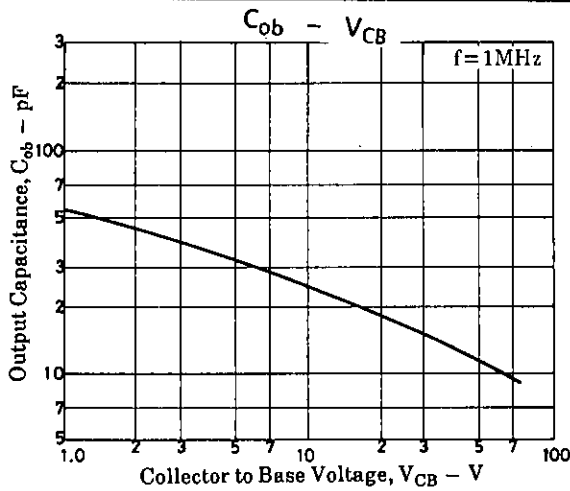

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.