

2SC4745

Silicon NPN Triple Diffused Character Display Horizontal Deflection Output

Feature

- High speed switching
 $t_f = 0.2 \mu\text{s typ}$
- High breakdown voltage
 $V_{CBO} = 1500 \text{ V}$
- Isolated package; TO-3PFM

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Item	Symbol	Rating	Unit
Collector to base voltage	V_{CBO}	1500	V
Collector to emitter voltage	V_{CEO}	800	V
Emitter to base voltage	V_{EBO}	6	V
Collector current	I_C	6	A
Collector peak current	$i_{C(\text{peak})}$	7	A
Collector surge current	$i_{C(\text{surge})}$	16	A
Collector power dissipation	P_C^{*1}	50	W
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Note: 1. Value at $T_C = 25^\circ\text{C}$.

Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	Min	Typ	Max	Unit	Test condition
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	800	—	—	V	$I_C = 10 \text{ mA}, R_{BE} = \infty$
Emitter to base breakdown voltage	$V_{(BR)EBO}$	6	—	—	V	$I_E = 10 \text{ mA}, I_C = 0$
Collector cutoff current	I_{CES}	—	—	500	μA	$V_{CE} = 1500 \text{ V}, R_{BE} = 0$
DC current transfer ratio	h_{FE}	7	—	30		$V_{CE} = 5 \text{ V}, I_C = 1 \text{ A}$
Collector to emitter saturation voltage	$V_{CE(\text{sat})}$	—	—	5	V	$I_C = 5 \text{ A}, I_B = 1 \text{ A}$
Base to emitter saturation voltage	$V_{BE(\text{sat})}$	—	—	1.5	V	$I_C = 5 \text{ A}, I_B = 1 \text{ A}$

TO-3PFM




1. Base
2. Collector
3. Emitter


2SC4745

Electrical Characteristics (Ta = 25°C) (cont)

Item	Symbol	Min	Typ	Max	Unit	Test condition
Fall time	t_f	—	0.2	0.4	μs	$I_{CP} = 5 \text{ A}$, $I_{B1} = 1 \text{ A}$, $f_H = 64 \text{ kHz}$

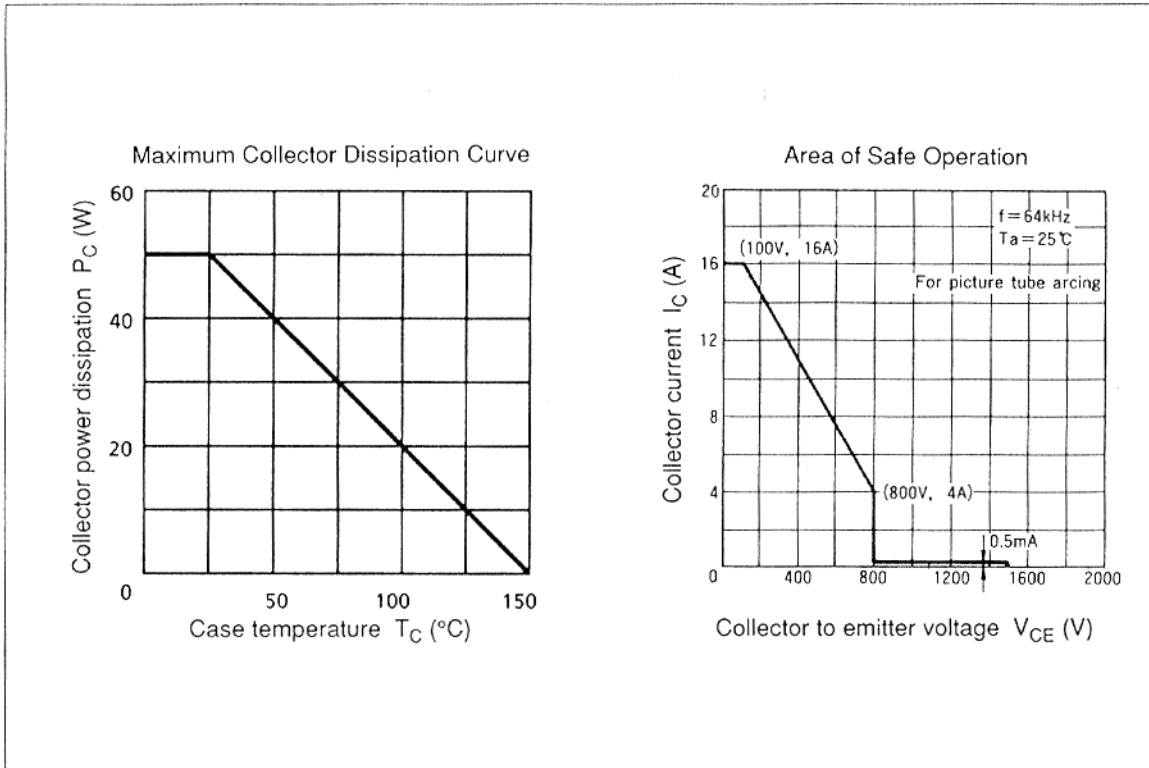


Typical Output Characteristics

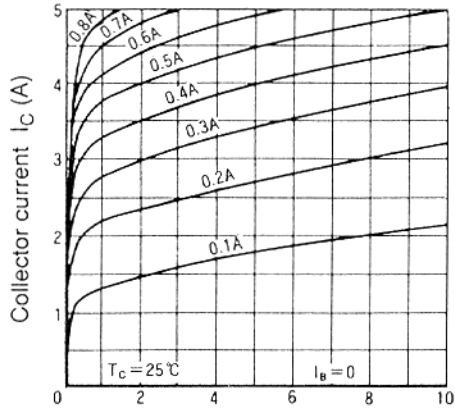


Collector to emitter voltage V_{CE} (V)

DC Current Transfer Ratio vs. Collector Current

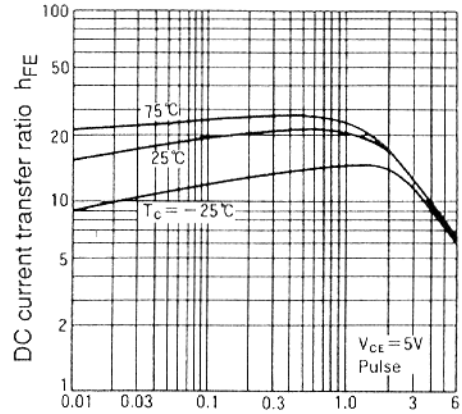


Collector current I_C (A)

Collector to Emitter Saturation Voltage vs. Collector Current

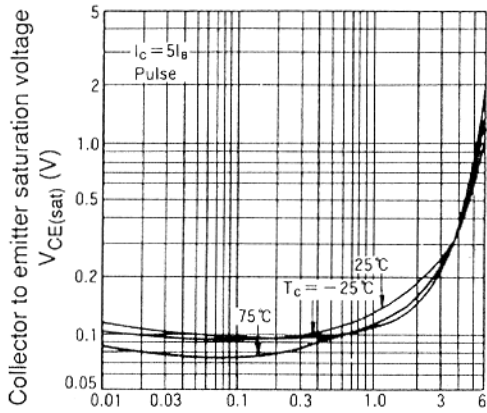

Collector current I_C (A)

Base to Emitter Saturation Voltage vs. Collector Current

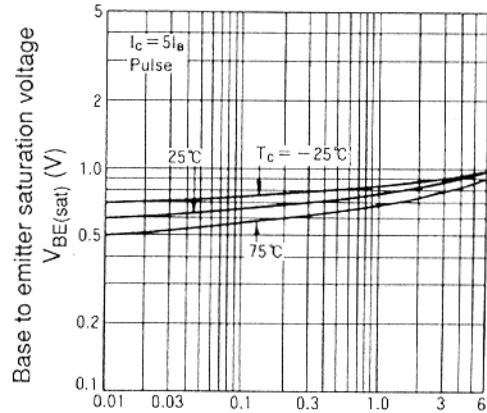

Collector current I_C (A)

2SC4745

