



6197

POWER PENTODE

FOR "ON-OFF" CONTROL APPLICATIONS INVOLVING
LONG PERIODS OF OPERATION UNDER CUTOFF CONDITIONS

GENERAL DATA

Electrical:

Heater, Pure Tungsten, for Unipotential Cathode:		
Voltage	6.3 ± 5%	ac or dc volts
Current at 6.3 volts . . .	0.65	amp
Direct Interelectrode Capacitances (Approx. with no external shield):		
Grid No.1 to Plate	0.125	μuf
Grid No.1 to Cathode and Heater	11.5	μuf
Plate to Cathode and Heater	5.0	μuf
Heater to Cathode	8.5	μuf

Characteristics, Class A, Amplifier:


Heater Voltage	6.3	volts
Plate Voltage	250	volts
Grid No.3	Connected to Cathode at Socket	
Grid-No.2 Voltage	150	volts
Grid-No.1 Voltage	-3	volts
Mu-Factor, Grid No.2 to Grid No.1	22	
Plate Resistance	90000	ohms
Transconductance	11000	μmhos
Plate Current	30	ma
Grid-No.2 Current	7	ma
Maximum Plate Current for grid-No.1 voltage of -12 volts	100	μamp

Mechanical:

Mounting Position	Vertical; Horizontal operation permitted if pins No.3 and No.8 are in a vertical plane	
Maximum Overall Length		2-5/8"
Maximum Seated Length		2-3/8"
Length, Base Seat to Bulb Top (Excluding tip)		2" ± 3/32"
Maximum Diameter		7/8"
Bulb		T-6-1/2
Base	Small-Button Noval 9-Pin (JETEC No.E9-1)	

BOTTOM VIEW

- Pin 1: Cathode
Pin 2: Grid No.1
Pin 3: Grid No.2
Pin 4: Heater
Pin 5: Heater



- Pin 6: Plate
Pin 7: Grid No.3,
Int. Shield
Pin 8: Grid No.2
Pin 9: Grid No.1

FREQUENCY DIVIDER IN COMPUTER SERVICE and "ON-OFF" CONTROL SERVICE

Maximum Ratings, Absolute Values:

PLATE VOLTAGE	300	max. volts
GRID-NO.3 (SUPPRESSOR) VOLTAGE	0	max. volts

MARCH 1, 1954

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA

6197



6197

POWER PENTODE

GRID-No.2 (SCREEN) VOLTAGE	250 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE	-50 max.	volts
PLATE DISSIPATION	7.5 max.	watts
GRID-No.2 INPUT	2.5 max.	watts
CATHODE CURRENT	50 max.	ma
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode .	180	max. volts
Heater positive with respect to cathode .	180	max. volts
BULB TEMPERATURE (At hottest point on bulb surface)	200 max.	°C

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.61	0.69	amp
Mu-Factor, Grid No.2 to Grid No.1	1,2	19	25	
Plate Current (1).	1,3	26	46	ma
Plate Current (2).	1,4	20	40	ma
Plate Current (3).	1,5	-	100	μamp
Grid-No.2 Current	1,4	5	9	ma
Reverse Grid-No.1 Current	1,6	-	2	μamp
Heater-Cathode Leakage Current: Heater negative with respect to cathode	1,7	-	40	μamp
Heater positive with respect to cathode	1,7	-	40	μamp
Transconductance	1,4	9000	13000	μmhos

Note 1: With 6.3 volts ac or dc on heater.

Note 2: With grid No.3 tied to cathode, grid No.2 tied to plate, plate voltage of 150 volts, grid-No.2 voltage of 150 volts, and grid-No.1 voltage of -3 volts.

Note 3: With plate voltage of 50 volts, grid No.3 tied to cathode, grid-No.2 voltage of 100 volts, and grid-No.1 voltage of 0 volts.

Note 4: With plate voltage of 250 volts, grid No.3 connected to cathode, grid-No.2 voltage of 150 volts, and grid-No.1 voltage of -3 volts.

Note 5: With plate voltage of 250 volts, grid No.3 connected to cathode, grid-No.2 voltage of 150 volts, and grid-No.1 voltage of -12 volts.

Note 6: With plate voltage of 250 volts, grid No.3 connected to cathode, grid-No.2 voltage of 150 volts, grid-No.1 supply voltage of -3 volts, and grid-No.1 resistor of 0.25 megohm.

Note 7: With 90 volts dc between heater and cathode.

• DC component must not exceed 90 volts.

MARCH 1, 1954


 TUBE DEPARTMENT
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA



6197

6/97

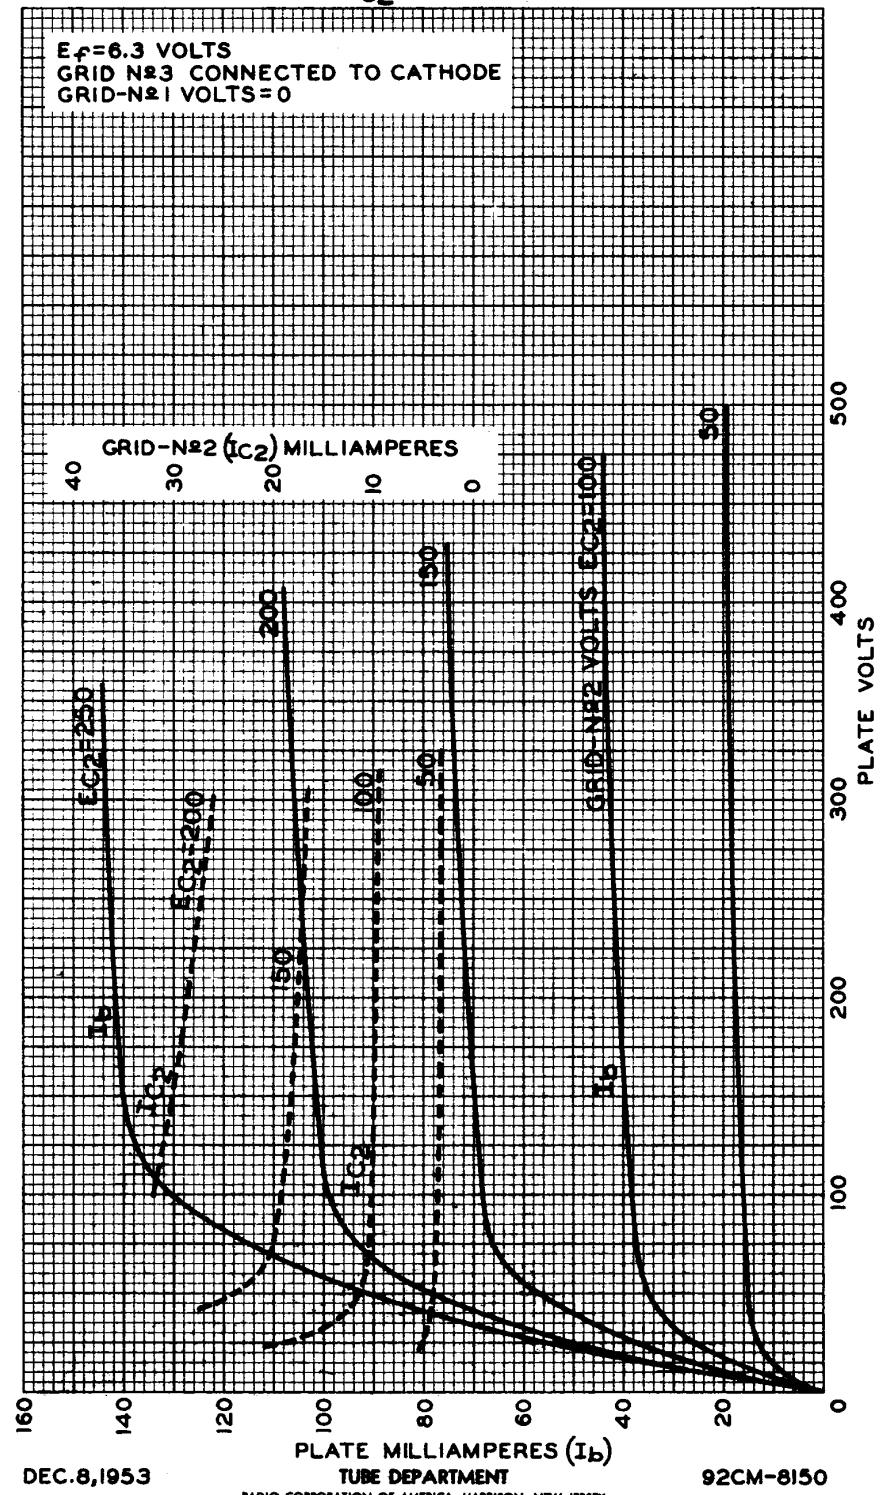
AVERAGE PLATE CHARACTERISTICS
WITH E_{C2} AS VARIABLE

6197



6197

AVERAGE PLATE CHARACTERISTICS
WITH E_{C1} AS VARIABLE

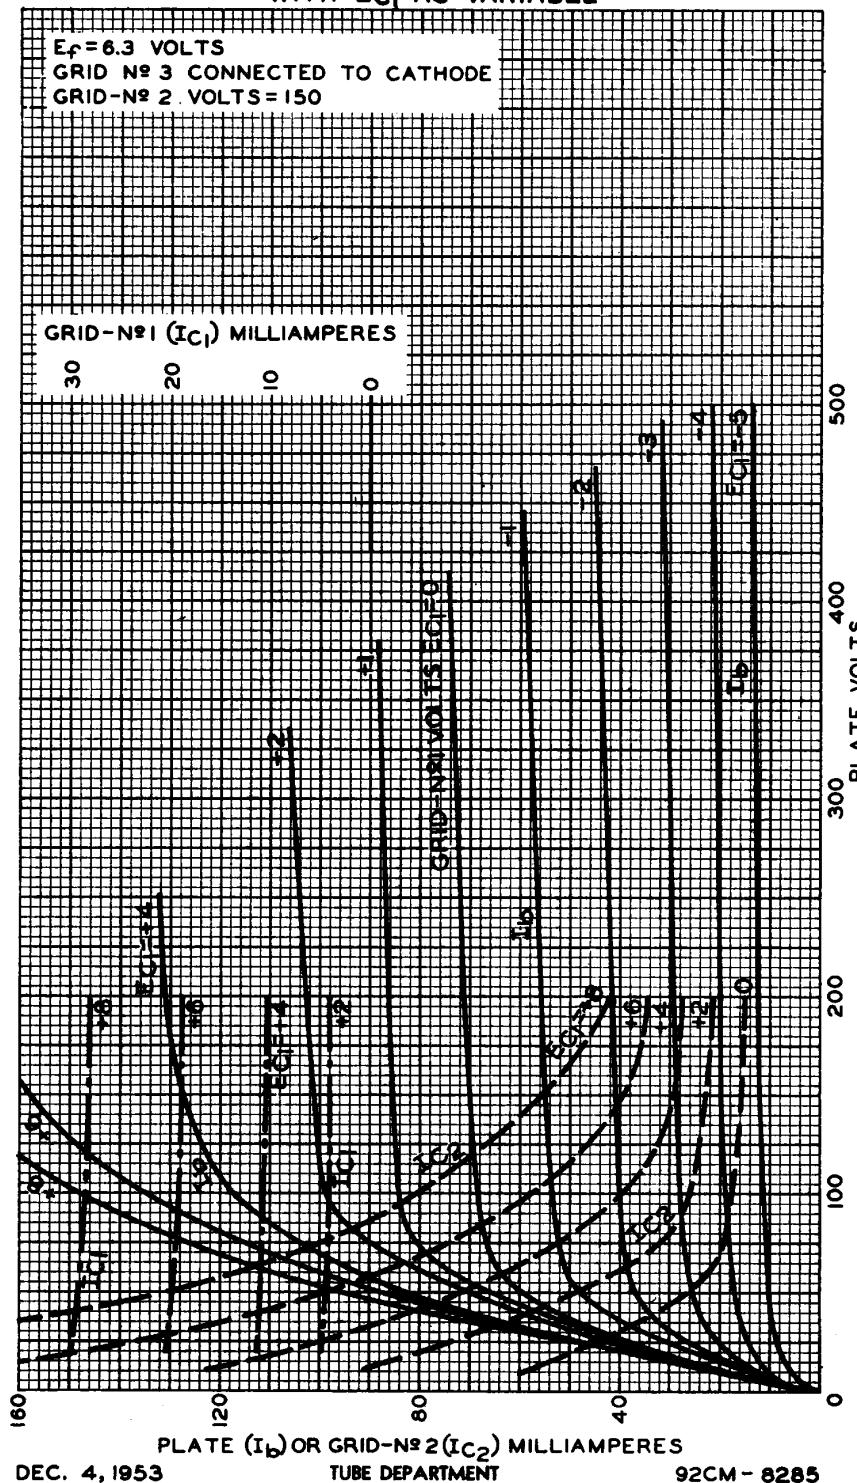

DEC. 4, 1953

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM - 8285



6197

6/97

AVERAGE CHARACTERISTICS

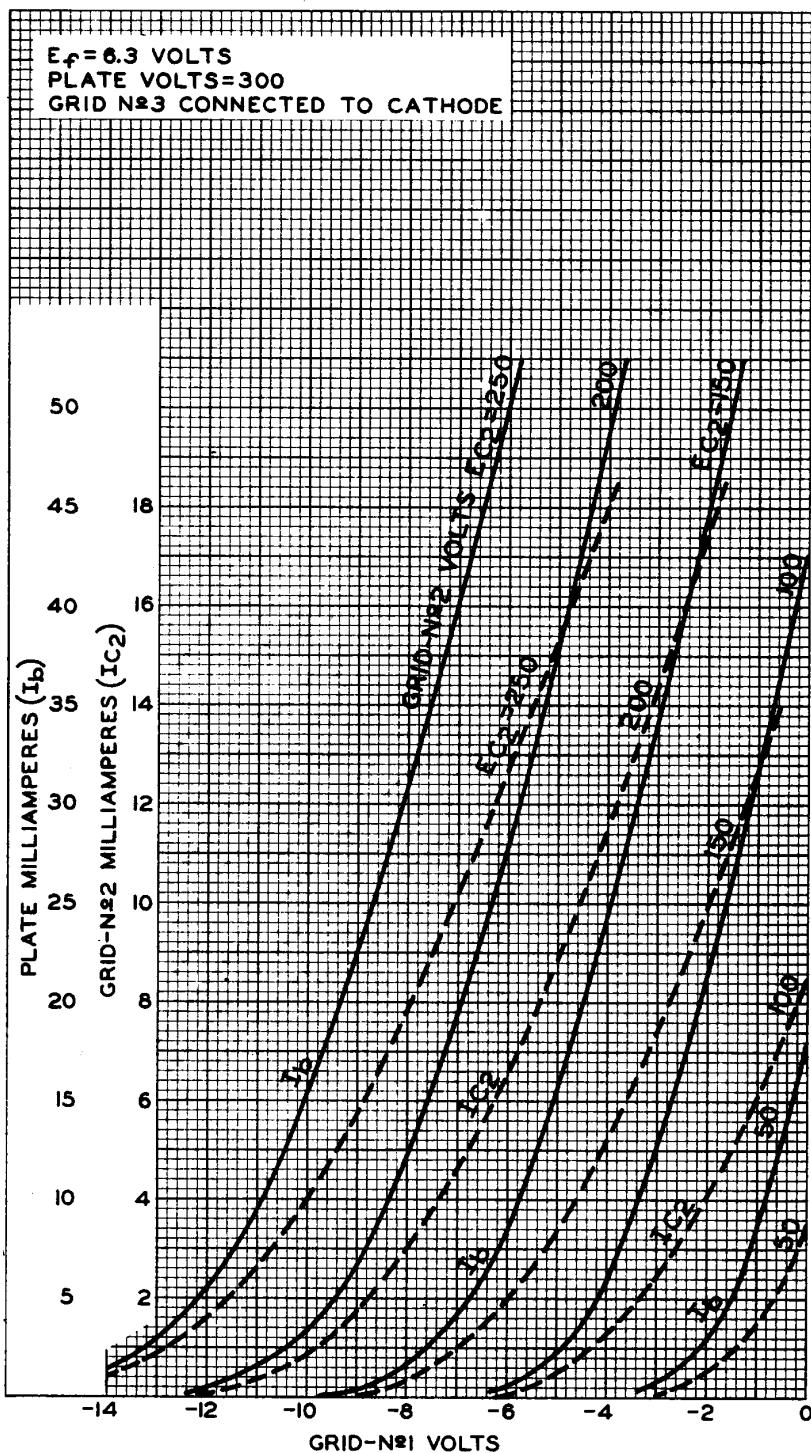

DEC. 4, 1953

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8149

6191



6197

AVERAGE PLATE CHARACTERISTICS
TRIODE CONNECTION

