

SANYO	No.2540A	2SB1216/2SD1816
		PNP/NPN Epitaxial Planar Silicon Transistors High-Current Switching Applications

Applications

- . Suitable for relay drivers, high-speed inverters, converters, and other general high-current switching applications

Features

- . Low collector to emitter saturation voltage
- . Good linearity of h_{FE}
- . Small and slim package facilitating compactness of sets
- . High f_T
- . Fast switching time

(): 2SB1216

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CBO}	(-)120	V
Collector to Emitter Voltage	V_{CEO}	(-)100	V
Emitter to Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)4	A
Collector Current(Pulse)	I_{CP}	(-)8	A
Collector Dissipation	P_C	1	W
		20	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a=25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=(-)100\text{V}, I_E=0$			(-)1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=(-)4\text{V}, I_C=0$			(-)1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE}=(-)5\text{V}, I_C=(-)0.5\text{A}$	70*		400*	
	$h_{FE}(2)$	$V_{CE}=(-)5\text{V}, I_C=(-)3\text{A}$	40			


Continued on next page.

*: The 2SB1216/2SD1816 are classified by 0.5A h_{FE} as follows:

70	Q	140	100	R	200	140	S	280	200	T	400
----	---	-----	-----	---	-----	-----	---	-----	-----	---	-----


Package Dimensions 2045B

(unit:mm)

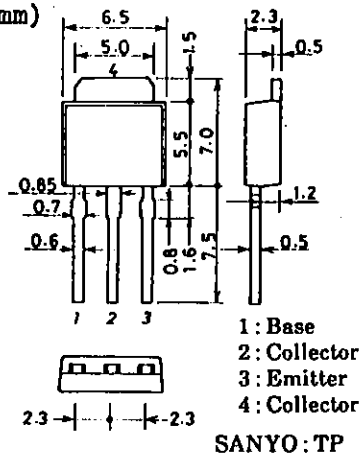

Package Dimensions 2044B






(unit:mm)

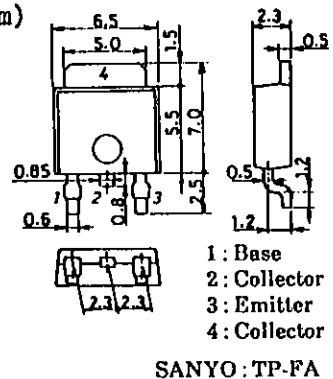









Continued from preceding page.

			min	typ	max	unit
Gain-Bandwidth Product	f_T	$V_{CE}=(-)10V, I_C=(-)0.5A$		180 (130)		MHz
Output Capacitance	c_{ob}	$V_{CB}=(-)10V, f=1MHz$		(65)40		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)2A, I_B=(-)0.2A$		150 (-200)	400 (-500)	mV
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)2A, I_B=(-)0.2A$		(-)0.9	(-)1.2	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	(-)	120		V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1mA, R_{BE}=\infty$	(-)	100		V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu A, I_C=0$	(-)	6		V
Turn-on Time	t_{on}	See specified Test Circuit.		100		ns
Storage Time	t_{stg}	"		(800)900		ns
Fall Time	t_f	"		50		ns





Switching Time Test Circuit

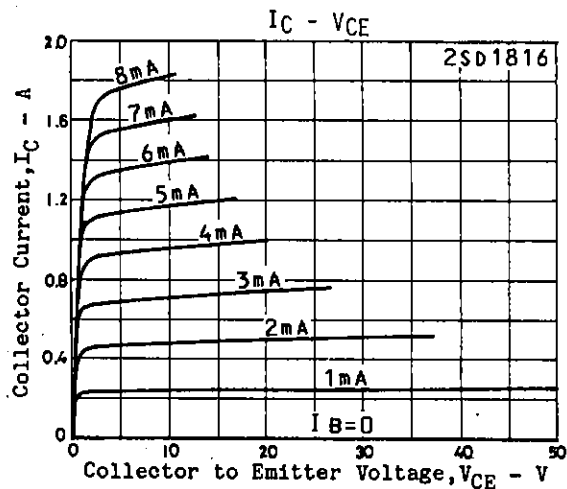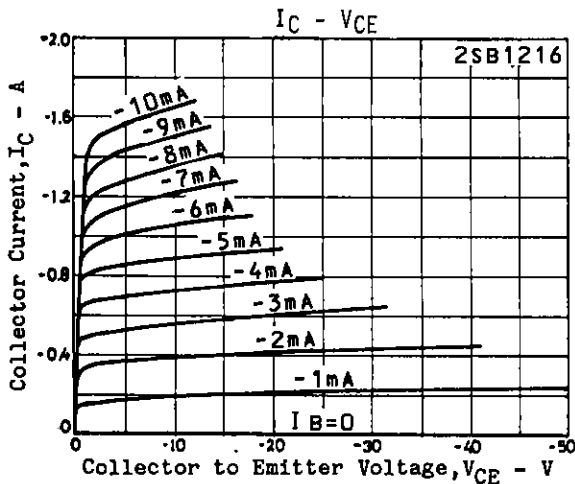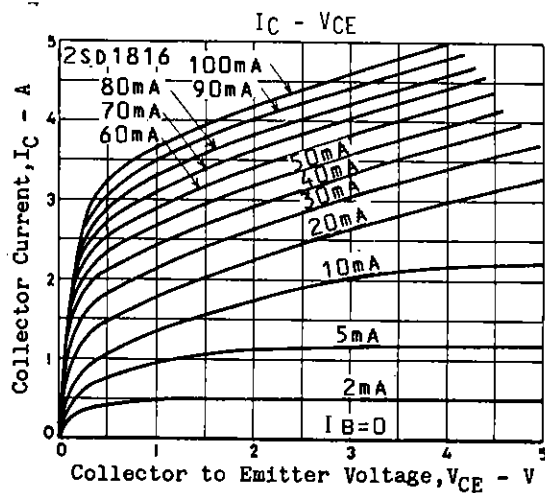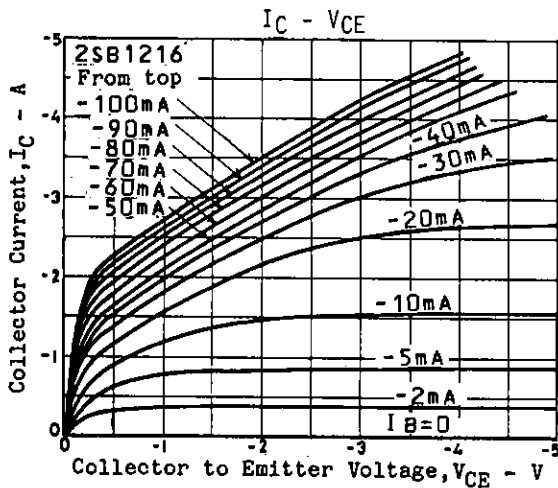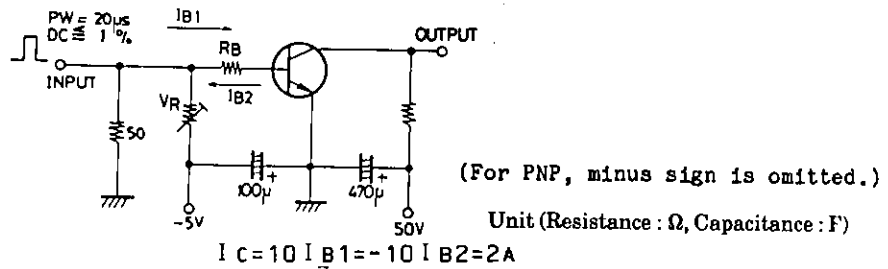

2SB1216/2SD1816

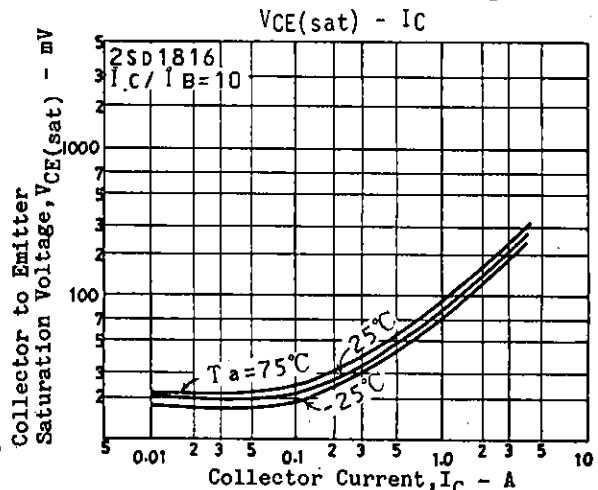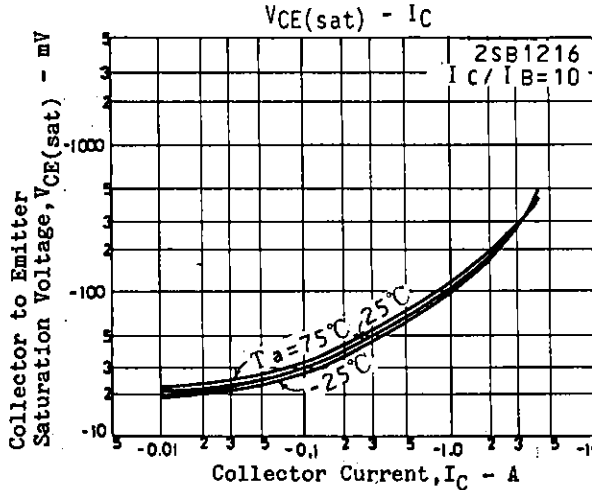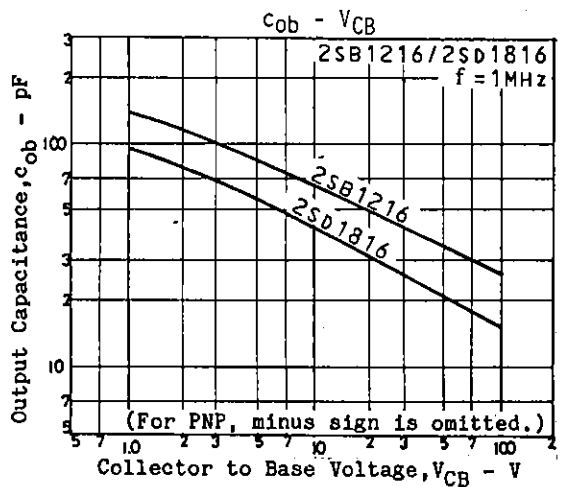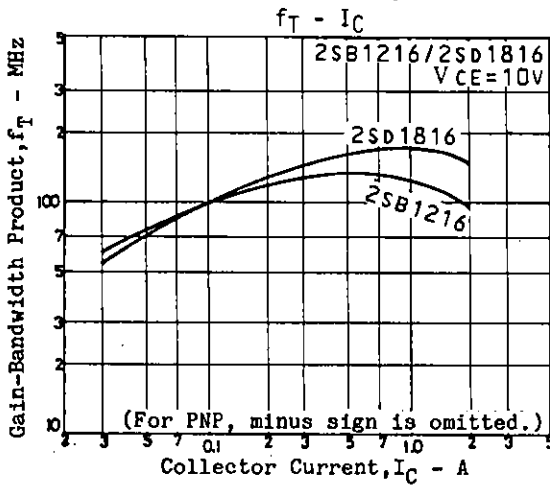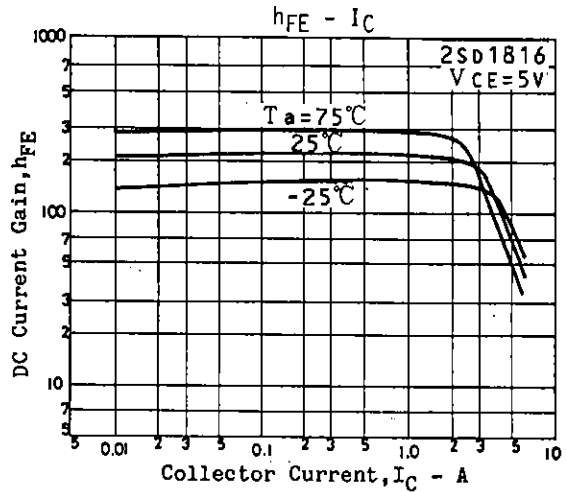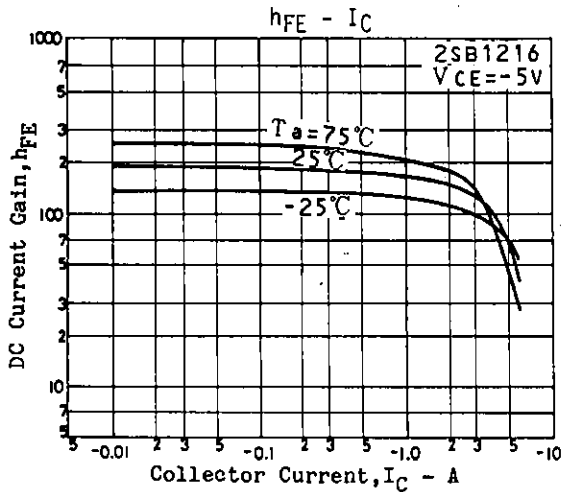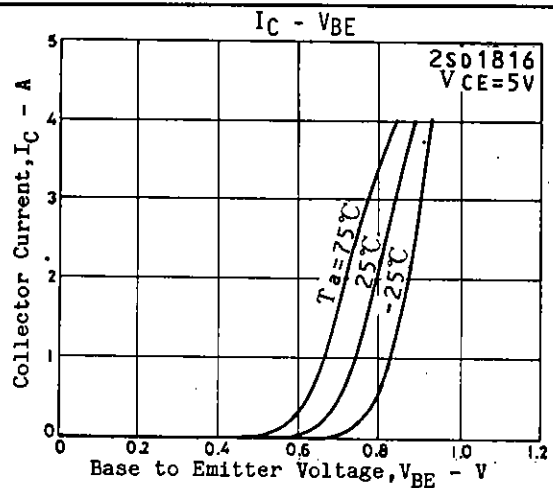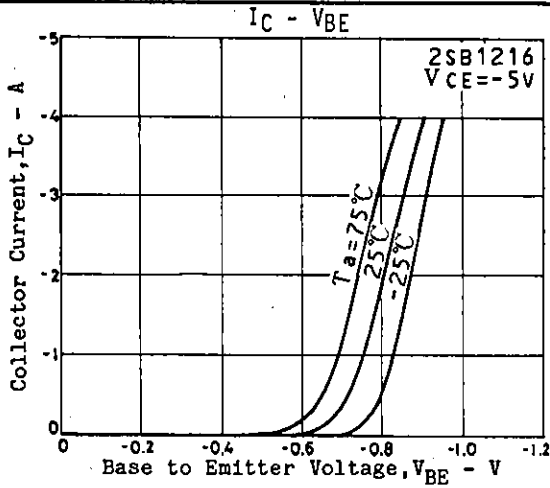

2SB1216/2SD1816

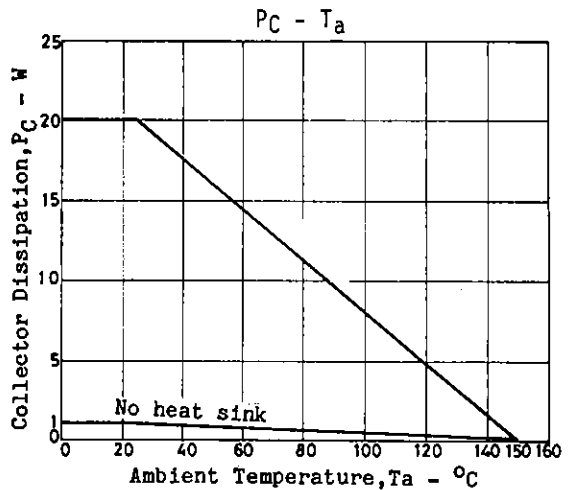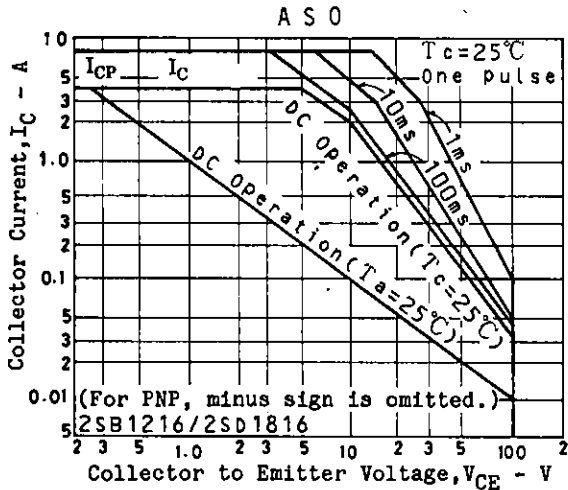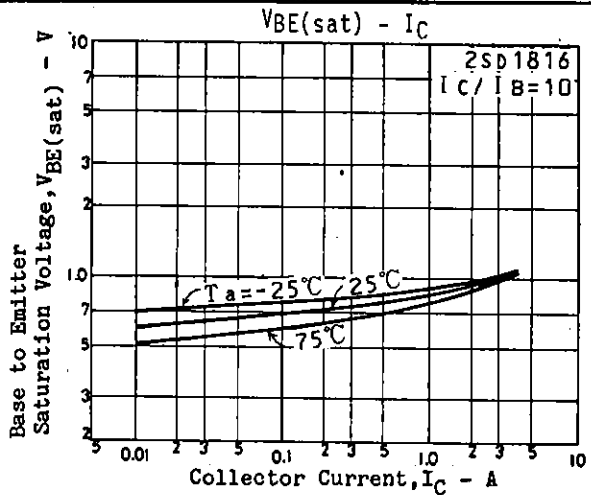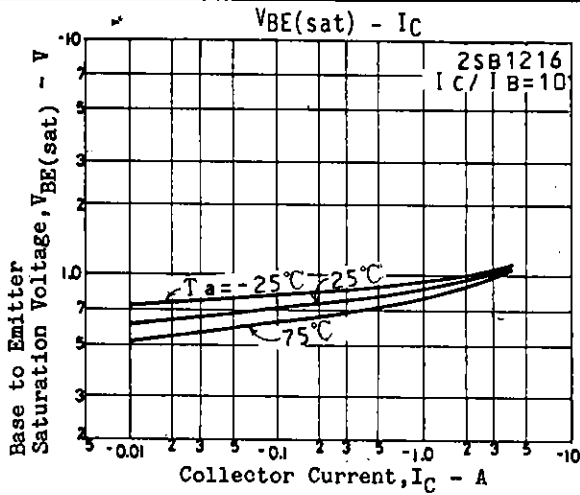

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.